



# Code of Good Agricultural Practice for the Protection of Air

MINISTRY OF AGRICULTURE,  
FISHERIES AND FOOD

WELSH OFFICE  
AGRICULTURE DEPARTMENT

OCTOBER 1998



Country **side**  
matters

## Summary

A summary of the key messages in this Code is set out below. You will be able to reduce air pollution from odours, ammonia, smoke and greenhouse gases by adopting these practices. Read the Code for further guidance.

### REDUCING ODOUR AND AMMONIA EMISSIONS

#### Slurry and manure spreading

- Wherever possible, use a band spreader or injector to apply slurry. *Paragraph 148, see also paragraphs 42 and 50.*
- Where a band spreader or injector is not used, a slurry spreader which gives a low trajectory and large droplets will produce less odour emission. *Paragraph 44.*
- After surface application of slurry and manure to bare land, incorporate the material into the soil as soon as possible. *Paragraphs 39 and 150.*
- Avoid applying more than 50 m<sup>3</sup> per hectare (4,500 gallons per acre) or 50 tonnes per hectare (20 tons per acre) at one time if odour could be a nuisance; reduce these rates, as necessary, so that the amount of total nitrogen applied does not exceed 250 kg per hectare per year. Only spread downwind of nearby houses and avoid spreading at weekends, bank holidays or in the evening. Consider if there are some fields where spreading should not take place. *Paragraphs 34-40.*

#### Livestock housing

- Wherever possible, collect and transfer slurry every day to a suitable store. *Paragraph 59*

- Where bedding is required, use enough to keep livestock clean and keep all manure as dry as possible. Manage drinking systems to avoid overflow and spillage. *Paragraph 59.*
- Keep concrete areas around buildings clean and free from any build-up of manure and slurry. *Paragraph 63.*

#### Slurry and manure storage

- Only mix slurry when the store is going to be emptied. Mixing should only be necessary to break up a surface crust or to remove sediment. *Paragraphs 92 and 144.*
- Do not add waste milk, whey or silage effluent to slurry or dirty water stores if there is a risk of causing odour nuisance from the store or when the store contents are applied to land. *Paragraphs 79, 80, 82 and 91.*
- If poultry manure and broiler litter is stored in the open, construct narrow A-shaped heaps to shed rainwater. *Paragraph 97.*

#### Siting of livestock buildings, slurry & manure stores

- Take into account the risk of causing odour and noise nuisance when planning the location of new structures or when considering the extension or refurbishment of existing structures. *Paragraph 126.*

### SMOKE POLLUTION

- Minimise the need to burn waste materials by first reducing the use of such materials wherever possible, then recycling materials where appropriate and, finally, by using alternative environmentally acceptable methods of disposal wherever practicable. *Paragraph 154.*

- If burning in the open is the only practicable method of disposal, do not burn plastics, rubber or other materials known to produce dark smoke. Make sure that all burning is carried out carefully with precautions to minimise fire hazard. *Paragraphs 155, 214 and 215.*

### GREENHOUSE GASES

- Seek opportunities to use energy more efficiently and to exploit non-fossil fuels as sources of energy. Improvements in energy efficiency reduce carbon dioxide (a greenhouse gas) emission and can reduce farm running costs. *Paragraphs 220-222.*



# Contents

		Paragraphs
<b>PART A: GENERAL INFORMATION</b>		
<b>1. Introduction</b>	About this Code	1–2
	Air pollution problems	3–5
	Advice	6
<b>2. Legislation</b>	Air pollution: general	7–10
	Planning consents	11–13
	Dark smoke	14–16
	Smoke control areas	17
	Prescribed processes	18
	Waste management licensing	19
<b>PART B: ODOURS</b>		
<b>3. General principles</b>	Introduction	20
	Causes of odour problems	21–25
	Minimising odours by good agricultural practice	26–29
<b>4. Minimising odours from land spreading of livestock wastes</b>	Introduction	30–33
	Precautions when spreading manure and slurry	34–40
	Precautions when spreading sewage sludge	41
	Choosing slurry spreading equipment	42–50
	Irrigation of liquid wastes	51–53
	Spreading solid manures	54–56
<b>5. Minimising odours from housed livestock systems</b>	Introduction	57–58
	<b>Livestock buildings</b>	
	Management	59–60
	Ventilation	61–62
	Open concrete areas	63
	Carcases	64
	<b>Cattle</b>	65–67
	<b>Pigs</b>	68–69
	Solid manure systems	70–71
	Slurry systems	72–73
	<b>Poultry</b>	74
	Caged laying birds	75–76
	Deep litter systems	77
	<b>Feeding and food stores</b>	78–79
Swill	80	
Silage	81–84	

		Paragraphs
<b>6. Minimising odours from stored slurry and manure</b>	Introduction	85–86
	Solid manure storage	87–89
	Storage of slurry and dilute effluents	90–94
	Storage of poultry manure	95–97
<b>7. Treating livestock wastes to reduce odour</b>	Introduction	98–99
	Mechanical slurry separation	100–104
	<b>Biological treatment of slurry</b>	
	General principles	105–106
	Aerobic treatment (aeration)	107–110
	Anaerobic digestion	111–112
	<b>Biological Treatment of Manure</b>	
	Composting	113–115
	<b>Biological Treatment of Odorous Air</b>	
Exhaust air from livestock buildings	116	
Treating Odours by Additives and Other Methods	117–119	
<b>8. Producing compost for mushrooms</b>	Introduction	120
	Laws	121
	Good practice	122–125
<b>9. Siting of livestock buildings, manure and slurry stores</b>	Introduction	126
	Factors affecting odour problems	127–130
	Siting of existing livestock units	131
	Siting new livestock units	132
<b>PART C:</b>	<b>AMMONIA</b>	
<b>10. Ammonia</b>	Introduction	133–134
	Ammonia emission	135–137
	<b>Reducing ammonia losses from manures and slurries</b>	
	Animal diets	138–140
	Housing	141–142
	Stores	143–144
	Application of manures and slurries to land	145–146
	Slurries	147–149
Solid manures	150	

<b>PART D: SMOKE POLLUTION</b>		
<b>11. General principles</b>		151–156
<b>12. Reducing the volumes of waste materials for disposal</b>	Reducing waste	157
	Recycling	158–159
	Ease of disposal	160–162
<b>13. Plastic materials</b>	Introduction	163–164
	Repeated use of plastics	165–166
	Alternative uses	167
	Recycling	168–169
	Choosing materials	170–172
	Containers contaminated by pesticides	173
<b>14. Tyres and rubber</b>	Dark smoke risk	174–175
	Disposal off the farm	176
<b>15. Waste oils</b>	Sources	177
	Recycling	178
	Waste oil burners	179
<b>16. Animal carcasses</b>	Introduction	180–182
	Notifiable diseases	183
	Incineration	184–185
	Open burning	186–187
<b>17. Fuels produced on the farm</b>	Introduction	188
	Straw and wood as fuels	189
	Choosing equipment	190–191
	Using and maintaining equipment	192–196
	Using litter from poultry and other animals as a fuel	197–201
<b>18. Other waste materials</b>	Introduction	202–203
	Crop residues	204–206
	Wood waste	207–210
	Paper sacks and other packaging	211
	Litter from poultry and other animals	212
<b>19. Burning in the open</b>	Good practice	213–214
	Safety precautions	215

		Paragraphs
<hr/>		
<b>PART E:</b>	<b>GREENHOUSE GASES</b>	
<b>20. Greenhouse gases</b>	Introduction	216–217
	The greenhouse gases	218
	Reducing emissions	219
	Carbon dioxide	220-222
	Methane	223-224
	Nitrous oxide	225
	Chlorofluorocarbons (CFCs)	226-227
	Halons	228
<hr/>		
<b>Appendices</b>		
		<b>Pages</b>
<b>Appendix I</b>	Environment Agency: contact details	72
<b>Appendix II</b>	Sources of information	73
	Legislation: general and odours	
	Legislation: smoke pollution	
	Codes of Practice	
	Welfare Codes	
	Greenhouse gases	
	Other publications	
<hr/>		
<b>Index</b>		77



# **PART A: GENERAL INFORMATION**



## Introduction

### About this Code

- 1 This *Code of Good Agricultural Practice for the Protection of Air (Air Code)* is a practical guide to help farmers and growers avoid causing air pollution from odours, ammonia and smoke, or from greenhouse gases which cause global warming. It will help you to minimise and dispose of your wastes in ways which reduce the risk of causing nuisance or annoyance from air pollution.

It is not a statutory code. Following this Code will not provide a defence such as 'best practicable means' (paragraph 10) if you cause air pollution. Nor will it protect you from legal action, although it should lessen the chance that this will happen. If you are in any doubt about what the law requires contact the local authority Environmental Health Department.

The Code describes the main causes of air pollution from different agricultural activities. In each Section, good agricultural practice is set down in a way which takes account of the need to avoid causing pollution or nuisance while allowing economic farming to continue. The Code was written using the latest information available. Any new practices not covered should follow the general principles laid down in this Code.

- 2 This Code does not give advice on noise or air pollution caused by dust. Advice on spray drift from pesticides is contained in the Code of Practice for the Safe Use of Pesticides on Farms and Holdings. The *Air Code* complements advice given in the *Code of Good Agricultural Practice for the Protection of Water (Water Code)* and the *Code of Good Agricultural Practice for the Protection of Soil (Soil Code)*. Copies of all these Codes are available free of charge from MAFF Publications, telephone 0645 556000.



This Code is a revised version of the one issued in 1992.

### **Air pollution problems**

- 3 Agricultural activities which involve housed livestock, storing wastes or spreading livestock wastes are those most likely to cause odour problems. Advice on minimising odour nuisance is given in Sections 3 to 9.
- 4 Agricultural activities can give off various gases which help to cause atmospheric problems. Advice on how to minimise the amount of gases given off is given in this Code. Ammonia, which contributes to making soils acid and can disrupt sensitive ecosystems is covered in Section 10. Section 20 covers greenhouse gases which contribute to global warming: carbon dioxide, methane, nitrous oxide and chlorofluorocarbons (CFCs).
- 5 Dark smoke or smoke nuisance from agriculture and horticulture can be caused by the burning of crop residues, packaging, plastics, tyres, waste oil or animal carcasses in the open or in unsuitable equipment. Advice on how to minimise the need to burn these materials and on how to avoid producing dark smoke or causing smoke nuisance when burning is given in Sections 11 to 19.

### **Advice**

- 6 You can get advice and information from local authority Environmental Health Departments and from the Environment Agency. Detailed design and planning services are available from independent consultants and equipment suppliers.



## Legislation

### Air pollution: general

7 The local authority Environmental Health Department is responsible for enforcing legislation on odour nuisance and smoke. Under Part III, Section 79, of the Environmental Protection Act 1990, local authorities have a duty to inspect their areas to detect any statutory nuisances and to take reasonably practicable steps to investigate complaints of statutory nuisance which are made to them.

8 Section 79 of the Act defines statutory nuisances as including:

- any premises in such a state as to be prejudicial to health or a nuisance;
- smoke emitted from premises so as to be prejudicial to health or a nuisance;
- any dust, steam, smell or other effluvia arising on industrial, trade or business premises and being prejudicial to health or a nuisance;
- fumes or gases so as to be prejudicial to health or a nuisance;
- any accumulation or deposit which is prejudicial to health or a nuisance;
- noise emitted from premises so as to be prejudicial to health or a nuisance;
- any animal kept in such a place or manner as to be prejudicial to health or a nuisance; and
- any other matter declared by any enactment to be a statutory nuisance.

9 Where a local authority Environmental Health Department is satisfied that a statutory nuisance exists, or is likely to occur or recur, it

has a duty to serve an abatement notice under Part III, Section 80 of the Act requiring:

- the abatement of the nuisance or prohibiting or restricting its occurrence or recurrence; and
- the execution of such works and the taking of such other steps as may be necessary for any of those purposes.

A person served with an abatement notice may appeal to a Magistrates' Court within 21 days of being served with the notice.

Apart from action taken by a local authority, any person aggrieved by a statutory nuisance can take proceedings in a Magistrates' Court.

- 10 It is an offence to contravene or fail to comply with an abatement notice without reasonable excuse. You could be fined up to £20,000 in a Magistrates' Court if you commit an offence under this part of the Act. It is usually a defence to show that you have used the 'best practicable means' (which is defined to have regard amongst other things to local conditions and circumstances, to the current state of technical knowledge and to the financial implications) to prevent or counteract the nuisance. Since the law relating to statutory nuisances is not straightforward, you would be well advised to consult a suitably experienced lawyer if difficulties arise, and should certainly do so if you are served with an abatement notice.

### Planning consents

- 11 Legislation governing planning consent for developments also includes provisions which relate to the avoidance of nuisances.

The Town and Country Planning (General Permitted Development) Order 1995 (the

GPDO) sets out certain types of development which may be carried out on agricultural land without planning permission. However, you will need planning permission for certain new facilities (such as livestock buildings, slurry storage and sewage sludge facilities) and for extensions or alterations to similar structures, where these will be within a distance of 400 metres from the boundary of any protected buildings (such as houses or schools). This rule has been introduced to reduce the number of potential odour problems coming from new livestock buildings or waste storage facilities being built close to housing developments.

- 12 For livestock buildings, slurry stores and sewage sludge facilities which do not require planning permission under the GPDO, a prior notification system is now in force. You must notify the local planning authority of your intention to construct such facilities. The local planning authority must then decide within 28 days whether it wishes to approve details of the siting, design and external appearance of the proposed development. Where prior approval is required, the development must not begin until such approval has been obtained.
- 13 The Town and Country Planning (Assessment of Environmental Effects) Regulations 1988 require an environmental assessment to be carried out for certain types of major project which are likely to have significant effects on the environment.

In the case of agriculture, environmental assessments are likely to be required for new pig units (more than 400 sows or 5000 fattening pigs) and new poultry units (more than 100,000 broilers or 50,000 layers or other poultry including turkeys). These thresholds may be amended. Under current planning regulations, new units of this size will almost certainly need planning permission. You should

talk to the local planning authority about the need for an environmental assessment before you send in a planning application. This may involve preparing an environmental statement covering the possible environmental effects of a project, e.g. emissions of offensive odours, and the measures to be taken to reduce these effects.

#### Dark smoke

- 14 The Clean Air Act 1993 prohibits the emission of dark smoke from chimneys of buildings or from trade premises. Land on which an agricultural or a horticultural business is carried on is considered to be trade premises.
- 15 The Clean Air (Emission of Dark Smoke) (Exemption) Regulations 1969, provide for the exemption of the burning of certain matter from Section 2 of the Clean Air Act 1993, which applies to trade premises. In certain circumstances, the Regulations allow the burning of carcasses of animals or poultry and containers contaminated by any pesticide, provided, amongst other things, there is no other reasonably safe and practicable method of disposing of the matter other than burning (paragraphs 173, 187 and 210).
- 16 Under the Clean Air Act 1993 (subject to the exemptions given in paragraph 15) the occupier of the premises and any person who causes or permits the emission of dark smoke at any time is guilty of an offence. Everyone who is involved in agriculture and horticulture should take all practicable steps to prevent the emission of dark smoke.

#### Smoke control areas

- 17 In some cases a farm may fall within a ‘smoke control area’ as declared by local authorities under the Clean Air Act 1993. It is an offence

to emit smoke from the chimney of any building caused by the burning of an unauthorised fuel in these areas. You should ask your local authority about any local smoke control areas.

#### Prescribed processes

- 18 Part I of the Environmental Protection Act 1990 establishes a pollution control system for certain ‘prescribed processes’. The Environmental Protection (Prescribed Processes and Substances) Regulations 1991 (as amended) set out the processes which pose a particular risk of air pollution and are subject to special controls. Those prescribed processes of particular interest to farmers are given in the tinted box. Under the Act, the Environment Agency and local authorities have powers to control pollution over a range of processes. Those activities which are affected need an authorisation. This would normally be from the local authority for farm scale processes.

The requirements for the local authority air pollution control system mean that:

- You must not operate a prescribed process designated for local authority control without their authorisation. The process must be operated using BATNEEC (best available techniques (including technology) not entailing excessive cost).

The Secretary of State’s Process Guidance Notes (available from HMSO) for all the main processes include detailed descriptions of the techniques to be applied in order to meet the BATNEEC objective (see Appendix II); and

- If you operate a prescribed process you must submit a detailed application to the local authority, for authorisation. You have to pay a fee with the application for authorisation as

well as an annual charge for that authorisation to continue in effect.

If you carry out a prescribed process which is exempted from local authority control because of size or volume, you should aim wherever practicable to meet the standards set out in the appropriate Process Guidance Note, to reduce the possibility of nuisance.

### Waste management licensing

19 The management of 'controlled waste' is subject to the waste management licensing system established under Part II of the Environmental Protection Act 1990 and the Waste Management Licensing Regulations 1994 and to other statutory controls. Waste produced on premises used for agriculture is not currently 'controlled waste' but certain agricultural wastes will be brought within the system in future regulations. The existing Waste Management Licensing Regulations 1994 control the disposal of non-agricultural waste to land: see Section 2 of the *Soil Code*.

#### Prescribed processes

Prescribed processes include many of interest to farmers such as:

- general waste incineration processes under 1 tonne per hour;
- waste oil burners below 3 MW net rated thermal input;
- straw combustion processes between 0.4 and 3 MW net rated thermal input;
- wood combustion processes between 0.4 and 3 MW net rated thermal input;
- poultry litter combustion processes between 0.4 and 3 MW net rated thermal input;
- animal carcase incineration under 1 tonne per hour;
- treatment and processing of animal or vegetable matter including:
  - fur breeding;
  - animal feed compounding; and
  - production of compost for mushrooms.

Some processes covered in the Process Guidance Notes, for example, any process under the heading of 'treatment and processing of animal or vegetable matter', are exempt from controls when carried out on a farm and when they do not involve the manufacture of goods for sale. Others may be exempt below a certain size of operation, for example animal carcase incineration below 50 kg/hour.





# **PART B: ODOURS**



## General Principles



### Introduction

- 20 This section describes the main causes of complaints about odours, outlines the sources of odours and how they can be measured. It also describes good agricultural practice to minimise odour problems.

### Causes of odour problems

- 21 Complaints from the public about odours caused by agriculture and industry are reported by local authorities and recorded every year by the Chartered Institute of Environmental Health. There were about 9,000 complaints in England & Wales caused by agriculture in 1995/96, involving an estimated 3,646 farm premises.
- 22 A survey of 212 local authorities in 1995/96 showed that pig units are responsible for around 50% of the livestock premises causing justifiable complaints, followed by poultry units (30%) and cattle farms (20%).
- 23 The application of slurry or manure to land was associated with 64% of the pig units in the survey causing odour complaints while 36% of the pig units caused complaints about farmyard odours from slurry and manure storage, livestock buildings, and livestock feed preparation and storage. For poultry units, 40% caused odour complaints from the field application of manure while 60% caused complaints about farmyard odours. For cattle farms, 74% caused odour complaints from the field application of slurry or manure while 26% caused complaints about farmyard odours.
- 24 Most farm odours come from several sources. For example, odours from buildings are mainly caused by the breakdown of faeces and urine. Other sources of odour are from waste food spilt onto floors, the scent glands of animals, and the animals' feed.

25 When slurries, silage effluent and solid manures are spread on land, they may also be a source of odour, either during or after the spreading takes place.

#### Minimising odours by good agricultural practice

26 It is not possible to avoid all odours from agriculture, because often the right techniques do not exist. Even where there is a solution, the cost may sometimes be too high. This is recognised by the legislation which refers to ‘best practicable means’, which takes financial implications into account.

27 However, by using good agricultural practice and appropriate control systems, you can minimise odour problems from both new and existing installations. The aim is to minimise the escape of odours beyond the farm boundary and, where practicable, stop it entirely. This is done by firstly paying attention to when, where and how you spread manure and slurry onto land and then, if necessary, reducing the amount of odour coming from other sources. Air movement and distance will reduce any problem, by diluting the odour.

28 You should carry out good agricultural practice as described in the following sections of this Code.

- Section 4 describes good agricultural practice to minimise odour nuisance from the spreading of livestock wastes on agricultural land.
- Section 5 describes good agricultural practice to minimise odour nuisance from housed cattle, pigs and poultry.
- Section 6 describes good agricultural practice to minimise odour nuisance during the storing and handling of slurry or manure.

In situations that could be particularly sensitive, you may need to go beyond good agricultural practice and use more rigorous treatment and control measures. Section 7 describes methods of treating livestock wastes to give further odour reductions during storage and spreading. Before investing in any of these you should take professional advice.

29 If an odour complaint has been made to the local authority Environmental Health Department and the complaint proves to be justifiable, then you should take the following steps.

First, discuss the matter with the Environmental Health Officer and find out the cause and source of the odour causing the complaint.

Second, compare the management practices and systems which you use for spreading livestock wastes, housing livestock and handling and storing manure or slurry, with those set out in Sections 4, 5 and 6. Make any changes that are needed.

Third, evaluate the improvements. At this stage, the amount of odour given off may have reduced enough to solve the problem.

If the improvement has not been enough, get advice on the techniques you need to use to reduce odour still further. Keep the local authority Environmental Health Department informed of proposals at all stages of the process.



### **Odour measurements**

Agricultural odours are caused by a large number of chemical compounds. No single compound has been identified which can be measured and used to assess odour.

‘Olfactometry’ is the method used to measure smells. It normally relies on using the human nose as a detector. It is based on the assessments of a trained panel under controlled laboratory conditions. Samples of odorous air are collected on site and transported to the laboratory.

Odour threshold value is most commonly used to measure an odour. It is the number of volumes of odour-free air needed to dilute an odour until it is smelt by only 50% of the panel members. The odour threshold value is commonly expressed as an odour concentration in odour units per cubic metre of air (units/m<sup>3</sup>).

Background odour concentrations measured in rural areas are typically 30 odour units per m<sup>3</sup>. There are few if any situations where farm odour concentrations at source are more than 5,000 units/m<sup>3</sup> air, whereas industrial odours may have to be diluted over a million times to reach the odour threshold value.



## Minimising Odours From Land-Spreading Of Livestock Wastes

### Introduction

- 30 This section describes good agricultural practice and the precautions you should take when spreading manure and slurry on land to minimise odour nuisance. It also discusses the choice of spreading machinery which affects the concentration of the odour emitted.
- 31 A number of factors affect the concentration of the odour emitted during and after spreading slurry or manure. These include the type of livestock (pig slurry tends to be most odorous), whether the waste contains waste milk or silage effluent (these increase the amount of odour released) and the method and length of storage. The type of spreading equipment used and rate of application to land are also very important.
- 32 Generally, the highest odour emissions occur while spreading of waste is actually taking place. With conventional splash-plate spreaders, the odour concentration can be seven to 15 times greater during spreading than immediately afterwards. Odour emission during the next eight to 12 hours may also be high enough to cause a nuisance. Odour emissions can be minimised by keeping contact time with air as short as possible.
- 33 Odours released during spreading of livestock wastes to land cause about half of all complaints of odours from agriculture. Odours from spreading manures and slurries can be smelt a long distance from the field, depending on the type of waste, the weather and the method of spreading.

### Precautions when spreading manure and slurry

- 34 Use a weather forecast to help choose suitable conditions for spreading. The best conditions are where air mixes to a great height above the ground, which are typically sunny, windy days,

followed by cloudy, windy nights. These conditions cause odours to be diluted quickly. Check wind direction in relation to nearby houses before spreading.

35 Avoid spreading in fields close to and upwind of houses unless slurry is band spread, injected or has been treated to effectively reduce its odour. The location of the fields where the slurry or manure will be applied, the direction and strength of the wind, and the distance from houses are all extremely important to get enough dilution and dispersal of the odour and so avoid problems.

36 Avoid spreading at weekends, bank holidays or in the evening unless it is absolutely necessary, and then only if slurry is band-spread, injected or has been treated to effectively reduce its odour.

37 Use tankers and spreaders which give a low trajectory and large droplets.

38 Avoid applying more than 50 m<sup>3</sup>/ha (4500 gallons per acre), or 50 tonnes/ha (20 tonnes per acre) at one time if odour could be a problem; reduce these rates as necessary so that the amount of total nitrogen applied does not exceed 250 kg per hectare per year. Always apply slurry and manure in a way that avoids the risk of causing water pollution. See Section 3 of the *Water Code* for detailed information on assessing the risk of causing water pollution and the land area needed for different classes of stock.

39 On bare land, lightly cultivate the land after surface spreading to mix in the material as soon as possible (see paragraph 150).

40 Avoid over-filling tankers or spreaders. Do not spill manure or slurry on roads; this may be an offence under the Highways Act, 1980. Clean the outside of spreading machinery regularly.

#### Precautions when spreading sewage sludge

41 Spreading of sewage sludge is controlled by the Sludge (Use in Agriculture) Regulations 1989 (as amended). Follow the *Code of Practice for Agricultural Use of Sewage Sludge*. Care should be taken to choose application sites so that odour nuisance is not caused. In general, the factors which affect odour nuisance are the same as those for slurry and manure.

#### Choosing slurry spreading equipment


42 Choosing suitable slurry-spreading equipment is, in many cases, the most important decision to be made when planning a waste-handling system to minimise odour problems.

43 Volatile odorous compounds in slurries are released when the slurry is directed onto a splash plate or similar device. This causes the jet of slurry to shatter into very small drops and releases odorous compounds directly into the air.

Often, it is this concentrated release of odour which causes problems. One tanker may spread three or four loads an hour, causing a series of such events.


44 Choose the type of slurry spreader that is suitable for the fields it will be used in. If the fields which the slurry will be spread on are away from houses, then you can use a tanker with a conventional splash-plate spreading device (see Figure 1). Tankers which give a low trajectory and large droplets are best.

**Figure 1: Conventional ‘Splash Plate’ Slurry Spreading Mechanism**

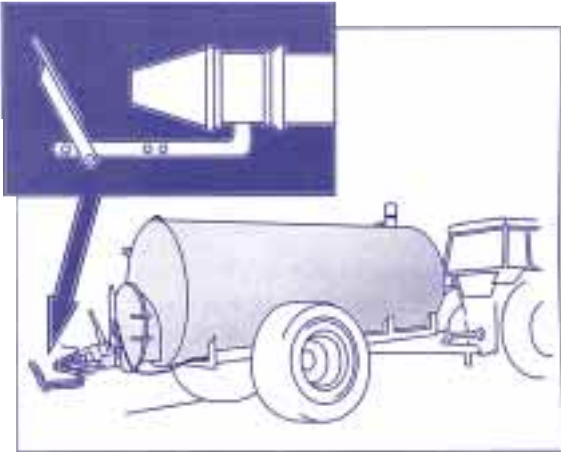

See paragraph 44 for situations where using this type of spreading mechanism is likely to be acceptable. Machines giving a low trajectory and large droplets are best.

**Figure 2: Band Spreader for Slurry**

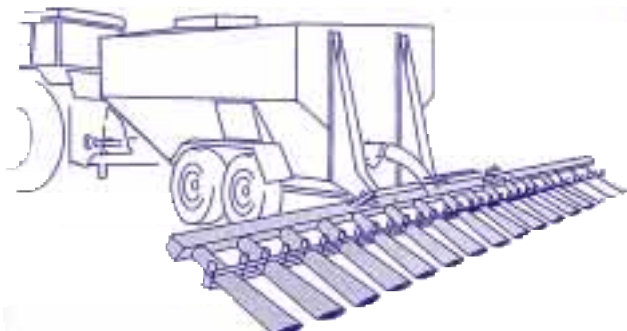

This type of mechanism can reduce odour emissions by 55 to 60% as compared with a conventional splash plate spreader.

45 When the fields are close to and upwind of houses, choose a machine for which there is reliable information on its ability to control the amount of odour which is emitted.

The band spreaders and injectors described in paragraphs 46-49 provide a series of choices for controlling odour. Spreaders with booms and curtains can also control odour. The costs of buying and running equipment vary in relation to the amount of control achieved. It may be necessary to separate slurry mechanically, or to remove coarse solids and stones to reduce the risk of blockages.

46 Band spreaders discharge slurry at ground level through a series of trailing pipes (see Figure 2). Measurements of odour show a reduction of 55 to 60% compared with conventional splash-plate spreaders.

47 Open-slot shallow injection allows slurry to be placed in shallow grooves in the soil, 50-60 millimetres (mm) deep, 200-300 mm apart. As with band spreaders the odour can be reduced by 55 to 60% compared with conventional spreaders.

48 Closed-slot shallow injection applies slurry at a depth of 50-80 mm in grooves 250-300 mm apart. The groove is then closed again by press wheels or discs. The amount of odour emitted is commonly 85% less than from conventional spreaders.

49 Closed-slot deep injection equipment applies slurry at a depth of 120-300 mm in the soil using injector tines, spaced about 500 mm apart (Figure 3). The amount of odour emitted is commonly 85% less than from conventional spreaders.



**Band spreaders**

Slurry is pumped to a manifold distributor, often in a rapid succession of pulses to make sure that all pipes are supplied at the same rate. The trailing pipes may hang loosely or can be more rigid with a small metal shoe which rides along on the surface, parting the crop and making sure that slurry is applied directly onto the surface of the soil.

**Closed-slot deep injection**

A winged tine may be used to loosen the soil over a strip about 20 centimetres wide so that slurry is mixed into the soil. However, as with all injection systems the method has limitations: it may not be usable when the soil is heavy, dry, frozen or stony, particularly in grassland, and where there are steep slopes. Deep injection generally requires a more powerful tractor compared with other systems.


50 The following points should help you choose slurry spreading machines to reduce odour emissions. Manufacturers should be able to provide such information. Look for:

- a reduction in the amount of odour emitted during spreading of at least 50% compared with a conventional splash-plate distribution device; and
- good control of application rate, so that the machine can give rates ranging from 20 m<sup>3</sup>/ha (1800 gallons per acre) to 50 m<sup>3</sup>/ha (4500 gallons per acre), when operating at a suitable speed.

**Irrigation of liquid wastes**

51 Dilute effluents and separated slurry are usually applied using sprinklers or travelling irrigators. A detailed description of such systems is given in Section 5 of the *Water Code*.

**Figure 3: Slurry Injector**

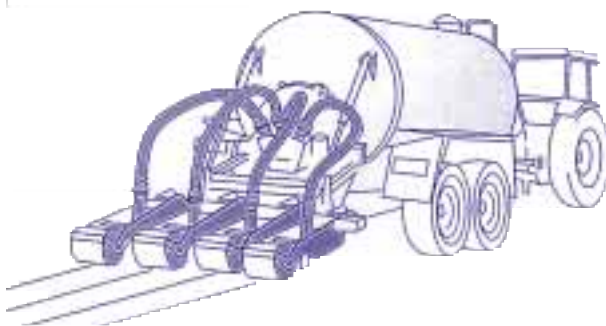

**Injection can reduce odour by 85% compared with a conventional splash plate spreader.**

- 52 Odour risks can increase when silage effluent, waste milk or the liquid from weeping-wall stores or manure stores is added to dirty water or separated slurry.

There will be some situations when storage will be needed for the dirty water or separated slurry to avoid causing water pollution. However, storing them for long periods will encourage odours to develop and extra care should be taken to avoid nuisance when such liquids are spread.

- 53 Application systems should be designed for the particular site. Where there is a risk of causing an odour nuisance, choose sprinklers or irrigators providing a low trajectory and operating at a low pressure to produce large droplets.

#### Spreading solid manures

- 54 Spreading solid manures, including mixtures of bedding and manure, poultry manure, solids from weeping-wall stores, and the solids from mechanical separators, can sometimes produce as much odour as spreading slurry.
- 55 Wherever possible, store manure in a way that will encourage natural composting. This process, when carried out correctly, as outlined in Section 6, reduces the concentration and offensiveness of odour released during spreading.
- 56 When odorous or partly composted manure has to be applied to land, do not spread it close to houses. Where practicable, you should spread it onto arable land and bury it immediately by ploughing.



## Minimising Odours From Housed Livestock Systems



### Introduction

57 This Section describes good agricultural practice to avoid odour nuisance from housed cattle, pigs and poultry. It also covers feeding and food stores, including silage making.

58 It is essential to maintain a high standard of hygiene and cleanliness. If you don't, all other measures to control odours are likely to fail.

### LIVESTOCK BUILDINGS

#### Management

59 These points relate to most livestock buildings on farms. Additional points relating to cattle, pigs and poultry are given in subsequent sections.

- Whenever possible, collect and transfer slurry every day to a suitable store. Dung from non-bedded, concreted areas, should also be dealt with in this way.
- Maintain drains and repair broken or badly laid concrete to prevent effluents from ponding within buildings.
- Where bedding is used, use enough to keep animals clean. Stock covered in manure can add to the amount of odours produced. Store bedding materials in a dry condition to avoid moulds and dust forming and the loss of capacity to absorb liquids.
- Manage drinking systems to avoid overflow and spillage.

60 Livestock buildings need to be cleaned regularly.

If livestock are produced in batches, thoroughly clean and disinfect buildings after each batch of

stock is removed. Remove thick deposits of dust from the surfaces inside the building and in particular from all ledges, ventilation shafts and cowls.

If livestock are not produced in batches, thoroughly clean and disinfect individual pens as they become empty.

Clean out grit and sediment from slurry channels, collection systems and stores. Thick sediments encourage micro-organisms to grow. This produces odours.

### Ventilation

- 61 Ventilation systems in livestock buildings have two functions: first, to control temperature and humidity and limit the concentration of poisonous gases and, second, to make sure that clean air is evenly distributed under a wide range of weather conditions.

Poor ventilation can result in humid conditions which give rise to the production of unpleasant odours, high levels of ammonia and poor animal health. Maintain ventilation fans and check that they are running at the correct airflow for the numbers and weight of animals or birds present.

- 62 The position and design of ventilation outlets will affect the dilution of smells from buildings. For new buildings, you should get advice on the most favourable ventilator outlet position for your site conditions. The higher the outlet is, the more the odour will be diluted by air movement. Ventilation outlets positioned along the sides of buildings below a slatted floor and immediately over a slurry collection channel can produce very strong odours.

### Open concrete areas

- 63 Keep areas of concrete which livestock use to the minimum necessary as these areas will be fouled by manure. Pipe or channel wastewater rather than letting it flow across clean concrete. Information on the disposal of dirty water from buildings and yards is given in Section 5 of the *Water Code*.


Keep concrete areas around buildings clean and free from any build-up of slurry or manure.

Maintain drains and repair broken or badly laid concrete to prevent effluents from ponding.

### Carcases

- 64 Remove and dispose of all dead animals, birds and foetal remains as soon as possible. (For safe methods of disposal see Section 16 of this Code and Section 13 of the *Water Code*).

## CATTLE

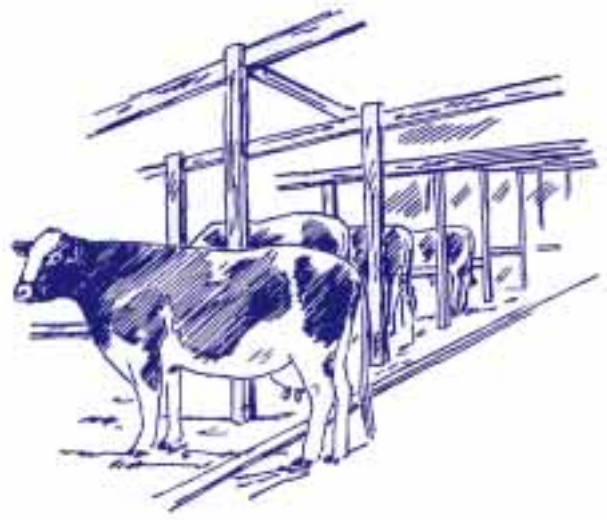

65 The space allowances and other provisions for cattle and calves must meet the requirements of the Welfare of Livestock Regulations 1994. You should follow advice in the *Code of Recommendations for the Welfare of Cattle*. For dairy cows loose-housed in yards, good management is essential to maintain a balance between stocking density and the amount of litter you use.

66 Providing cubicles of suitable dimensions for the size of the cows is crucial for maintaining the cleanliness of the animals. Keep cubicles well maintained. Unless you use mats, you should keep bedding clean and topped up daily.

Scrape cubicle passages and other heavily soiled areas regularly, typically twice daily.

67 Dairy and parlour buildings need to be washed and cleaned frequently. Where disinfectants are used, make sure you have the correct type and quantity of disinfectant and the right volume of wash water. If you use high pressure hoses take care to avoid splashing manure onto walls, ceilings and milking equipment.

NOTE: COLLECT CONTAMINATED WASH WATER AND DISPOSE OF IT IN A WAY THAT WILL NOT CAUSE WATER POLLUTION.

### PIGS

68 The space allowances and other provisions made for pigs must meet the Welfare of Livestock Regulations 1994. You should follow advice in the *Code of Recommendations for the Welfare of Pigs*.

69 Odour problems are minimised if pens are kept clean. Dirty pens can be caused by a number of factors including poor management, ventilation and building design. Overstocking or

understocking, poor ventilation design, wrong pen shape, poor floor surfaces, incorrect construction of pen divisions, as well as badly sited feeding and watering facilities, can all contribute to dirty pens.

### Solid manure systems

70 Bedded systems often fail to absorb all the effluent produced. Appropriately placed drainage and suitably sized and constructed collection tanks should be part of such systems.

71 Wherever possible you should clean non-bedded, concreted dunging areas every day.

### Slurry systems

72 Less odour comes from fresh slurry and therefore you should remove slurry from buildings while it is fresh if this is practicable.

73 Clean slats give off less odour. Well designed and installed slats should be self-cleaning and minimise the risk of injury to the pig.

### POULTRY

74 Increasing stocking density increases odour production. The conditions under which poultry must be kept are set out in the Welfare of Livestock Regulations 1994 which make specific provisions for the welfare of laying hens in battery cages. You should follow advice in the *Code of Recommendations for the Welfare of Domestic Fowls*. The type of feed, the humidity in the building and the amount of litter, if used, all contribute to the amount of odour produced. To reduce odour, maintain any manure stored within the house in a dry condition.

### Caged laying birds

75 Frequently removing the manure which is collected on belts beneath cages to a store or spreader outside the building helps to reduce odour. How often you need to remove the manure will vary from daily to twice-weekly depending on the system design. Proprietary in-house systems are available for rapid air-drying of manure on the belts. Do not add water to poultry manure as this can result in strong, unpleasant odours.

Prevent leaking drinkers spilling water onto manure belts or into manure stores.

76 If the manure is stored beneath the caged area, rapid air-drying of the manure will reduce odour formation. One way of achieving this is to separate the manure store from the birds with a slotted floor. The manure is scraped each day to fall through the slots into a storage area beneath the floor. If the ventilation air leaves the building by going through the slotted floor, this increases air-drying of the stored manure.

### Deep litter systems

77 The drier the litter is in poultry houses for broilers, growers, breeders or layers, the lower the risk of odour from the buildings. In many cases, keeping the litter dry will be enough to avoid problems. Paying attention to one or more of the following points will help to achieve this.

- Buildings should be adequately ventilated and also insulated with suitable materials which have a vapour barrier to prevent deterioration of the insulation.
- Direct-fired gas or oil heaters put extra moisture into the house. Indirect heating systems avoid this problem.

- Drinkers should be designed to minimise spillage. If suitable for the type of stock, nipple and drip cups (or similar system) are preferable to hanging bowl drinkers, as they minimise water spillage. The drinking system must be maintained at the correct height by frequently adjusting them to bird eye level to avoid spillage and wet litter.
- Litter should be 10-15 centimetres deep which should be enough to absorb the manure load.
- Feeds which contain certain oils and animal fats which are poorly absorbed by the birds can result in the manure being greasy, causing capping of the litter and odour production. Rations should be adjusted to minimise this problem if it occurs.

### FEEDING AND FOOD STORES

78 Odours can be absorbed by dust particles and then carried in the air. Finely ground feeds and long feed drops (into bins or onto floors) increase amounts of dust. Using liquid-feeding systems or pelleted feed can reduce dust and may help to reduce odours.

79 Keep foods such as milk by-products (whey, skimmed milk), yeasts and molasses which can produce strong odours in properly constructed covered tanks or silos. The delivery area should be concreted and all spillage and wash water should be piped into the foul-drainage system.

### Swill

80 The collection and treatment of swill by cooking is controlled by the Diseases of Animals (Waste Food) Order 1973. Premises have to be approved and licensed by MAFF. Processing of swill often causes odour complaints.



Using automatically controlled systems which avoid excess steam injection can reduce odours and save fuel. Enclosed treatment systems stop nearly all escaping steam and greatly reduce odours from cooking. Odours can also be reduced by maintaining the treatment equipment properly and by avoiding spilling the feed. Letting swill cool before feeding it to the pigs may help to reduce odours.

**SAFETY NOTE: DO NOT ALLOW EFFLUENT FROM SWILL OR WHEY TANKS AND FROM ENSILED PRODUCTS TO ENTER SLURRY CHANNELS AS THIS MAY CAUSE LETHAL GASES TO BE RELEASED.**

### Silage

81 Controlling odours from silage clamps, once these have been opened for daily use, can be difficult because of the large surface area exposed. Well-made silage smells a lot less than silage which is badly made.

82 You should take the following precautions to control smells from silos and during the handling and disposal of silage effluent.

- Do not let silage effluent flow across open concrete; it should be collected in a channel and taken to a suitable storage tank.
- Apply silage effluent with a suitable slurry spreader (see Section 4). Do not spread silage effluent on fields where it is likely to cause odour problems. Do not apply silage effluent to land where it could cause water pollution (see Section 8 of the *Water Code*).
- Do not add silage effluent to slurry stores if the store or the land the slurry will be spread on could cause odour problems.

**SAFETY NOTE: ADDING SILAGE EFFLUENT TO SLURRY PRODUCES LETHAL GASES VERY QUICKLY. NEVER ADD SILAGE EFFLUENT TO SLURRY IN CONFINED SPACES OR IN BUILDINGS.**

83 The design and construction of new, substantially enlarged or substantially reconstructed silos and effluent systems must comply with the Control of Pollution (Silage, Slurry and Agricultural Fuel Oil) Regulations 1991 (as amended).

84 Consider making baled and wrapped or bagged silage where silos could cause an odour nuisance. Baled silage has the advantage of being enclosed until you use it and only a small quantity is exposed at any time. Careful use of this technique can help to limit the amount of odour released.





## Minimising Odours From Stored Slurry And Manure

### Introduction

85 This section describes good agricultural practice for the design and management of manure and slurry stores in order to reduce potential odour nuisance.

86 Storage of manures and slurries is also one of the most important ways of avoiding water pollution at times of the year when spreading them to land is likely to cause pollution. A detailed description of the design and management of slurry and manure storage facilities is given in Sections 4 and 6 of the *Water Code*.

### Solid manure storage

87 To minimise odours from manure stores, you should encourage natural composting to take place within the store by helping air to penetrate the bulk of the manure. Make sure that there is enough bedding in the mix to allow air to penetrate. Thorough composting is unlikely to take place unless you use a proper composting process (see paragraphs 113-115)

88 The design of the store is also important. If the store has walls, preferably they should be constructed so that there is a series of gaps at least 25 millimetres wide to allow air into the manure. It is also preferable to have low, long, narrow stores, no more than 10-15 metres wide and no taller than 3 metres high. A series of stores will mean that one store can be filled and left to compost naturally for a period of time while a second is filled.

89 You should provide a way of safely collecting and containing any run-off from the store, to avoid causing water pollution (see the *Water Code*).





#### Storage of slurry and dilute effluents

- 90 The design and construction of new, substantially enlarged or substantially reconstructed slurry stores must comply with the Control of Pollution (Silage, Slurry and Agricultural Fuel Oil) Regulations 1991 (as amended). The *Water Code* gives advice on the design, construction and management of stores for slurry and dirty water. General points of good management to avoid odour nuisance are described below. Siting of stores in order to avoid odour nuisance is covered in Section 9 of this Code.
- 91 Do not add feeds such as milk or whey or silage effluent to slurry or dirty water if there is a high risk of causing odour problems because of the location of the slurry store, or from spreading the waste. Where practicable, you should contain silage effluent in a separate collection tank.
- 92 If slurry is frequently agitated in store there will be a frequent release of odours. If possible, above-ground circular stores located where there is a high risk of causing odour problems should be equipped with an efficient agitation system which can break up any crust or remove any sediment. This will then need to be used only when the tank is going to be emptied.
- 93 If slurry is stored in a lagoon or an above-ground tank, it can be easier to manage if it has been mechanically separated (see Section 7). Mechanical separation removes coarse solids from the slurry leaving a liquid that can be more easily pumped. This liquid can be stored without having to mix it frequently which can reduce the amount of odour released.
- 94 If cattle slurry contains a lot of straw bedding material, a self-draining, weeping-wall store can be used.

**SAFETY NOTE: THE ADDITION OF SILAGE EFFLUENT OR WHEY TO SLURRY CAN RELEASE LETHAL GASES. NEVER ADD THESE MATERIALS TO SLURRY IN CONFINED SPACES OR BUILDINGS.**

You should choose the best weather conditions whenever slurry is mixed, if there is a risk of causing odour nuisance. These are where air mixes to a great height above the ground, which are typically sunny, windy days, followed by cloudy, windy nights. Check wind direction in relation to nearby houses.

The contents of the store are removed for spreading once they are dry enough. Usually, these solids are only emptied once a year. The liquids draining from the store pose a potential odour problem. They should be spread in a place and using equipment which will minimise the risk of odour problems and water pollution (see Section 4).

### Storage of poultry manure

95 Poultry excreta has a dry matter content of 20-24%. It is best to handle it as a semi-solid. It should not be diluted with water, as this can result in strong unpleasant odours.

Laying-hen excreta which is collected on belts can be air-dried in the poultry house, as described in paragraph 75. Where practicable, it should be stored under cover, on a base which will not let liquids pass through, until you spread it on the land.

96 Broiler litter, when well managed in the house, should have a dry matter content of at least 65%. To avoid it becoming wet and causing odour problems you should, where practicable, store it under cover, on a base which will not let liquids pass through, until you spread it on the land. Do not burn it under uncontrolled conditions in the open (see Part D of this Code).

97 If you use field heaps, they should be put as far away as practicable from residential housing, and not within 10 metres of a watercourse, ditch or field drain, and not within 50 metres of a spring, well or borehole that supplies water for human consumption, or is to be used in farm dairies. Narrow A-shaped heaps shed rainwater more easily and prevent manure from becoming very wet.

## Treating Livestock Wastes To Reduce Odour



### Introduction

98 This section describes methods of treating livestock wastes to give further reductions in odour emissions during storage and spreading. It also describes the treatment of odorous air. **All of these techniques go beyond odour reductions that would result from the good practice described in earlier sections of this Code. However, the use of these techniques may be necessary in exceptional situations.**

99 Aerobic and anaerobic treatment can be expensive, as the costs of buying and running the treatment systems must be added to the cost of collecting, storing and spreading the waste. It is important that you get advice to make sure that the treatment you intend to use works efficiently and is suitable for the specific problem, and is cost effective.

The type and degree of treatment that is needed depends on how serious the odour problem is. In some cases, the source odour concentration may need to be reduced by as much as 95% before the odour problem is reduced enough (see Section 3 for definitions of odour concentration).

### Mechanical slurry separation

100 Mechanical separation can be useful as an aid to improved waste management. There is a range of mechanical separators available for livestock slurries. It is important that the correct machine is chosen for the slurry produced on a particular farm.

101 The process removes coarse solids from farm slurries. The solid portion, 10-20% of the original slurry volume, can be stacked and stored in a similar way to farmyard manure. If this solid is produced by a separator which


gives high dry-matter solids, this portion may compost readily to produce a relatively mild-smelling material which is unlikely to cause a nuisance.

**102** The separated liquid portion, which is 80-90% of the original volume, flows easily and can therefore be pumped to a store and handled by the band spreaders or slurry injectors described in Section 4, without causing blockage problems. After separation, storing the liquid portion results in less of a surface crust forming and solids settling. Therefore, mixing in store only needs to be carried out occasionally so odours during storage are reduced.

**103** The separated liquid portion of slurry can be applied in the spring to arable crops or grass after silage cuts. This makes good use of the nutrient content. The separated liquid leaves very little solid residue on crops and avoids one of the sources of odour associated with whole slurry.

**104** Mechanical separation is usually a necessary treatment before aerobic treatment (aeration) because it is easier to aerate separated liquid than a mixture that contains large particles which need extra power input to keep them in suspension and more oxygen to give odour control.

**Figure 4: Options for Slurry Treatment – Aeration**

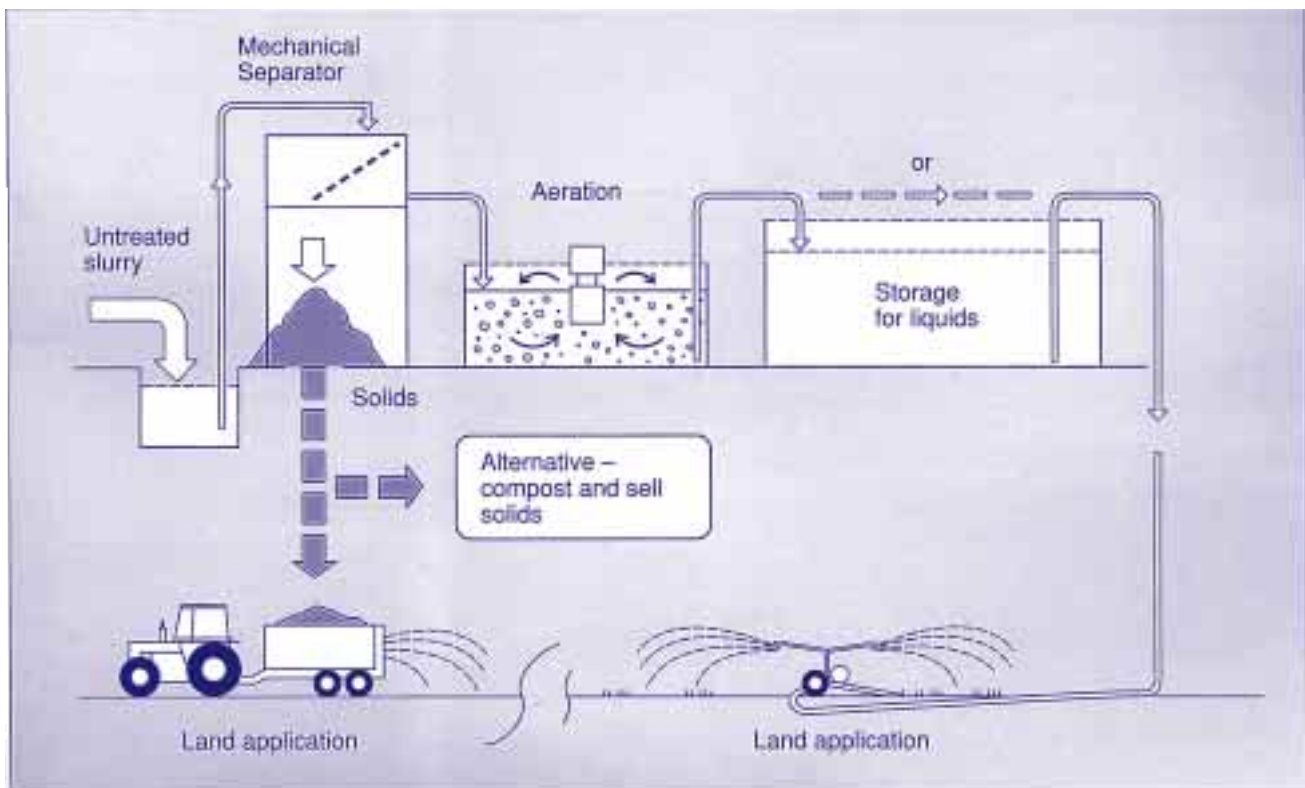

**Choice of mechanical separator**

For pig slurry of 2-4% dry matter, a wedge wire run-down screen or vibrating screen will work satisfactorily. The dry matter content of the separated solids will be usually 8-12%. These solids will self-drain if they are held in a suitable store. For pig and cattle slurries, separators which press and squeeze the slurry against a fabric belt or perforated stainless steel screen will produce a solid with a dry matter ranging from 18-30%. These solids can be composted.


**BIOLOGICAL TREATMENT OF SLURRY**

**General principles**

105 Techniques for treatment of slurries and other organic effluents using micro-organisms are well developed. There is a range of treatments for agricultural slurries and other effluents; examples of these are set out in Figures 4 and 5.

106 Any treatment of slurry by micro-organisms relies on steady flow conditions to encourage their rapid continuous growth. Therefore, it is essential that the daily loading rate of slurry should be kept within the design standards of

**Figure 5: Options for Slurry Treatment – Anaerobic Digestion**

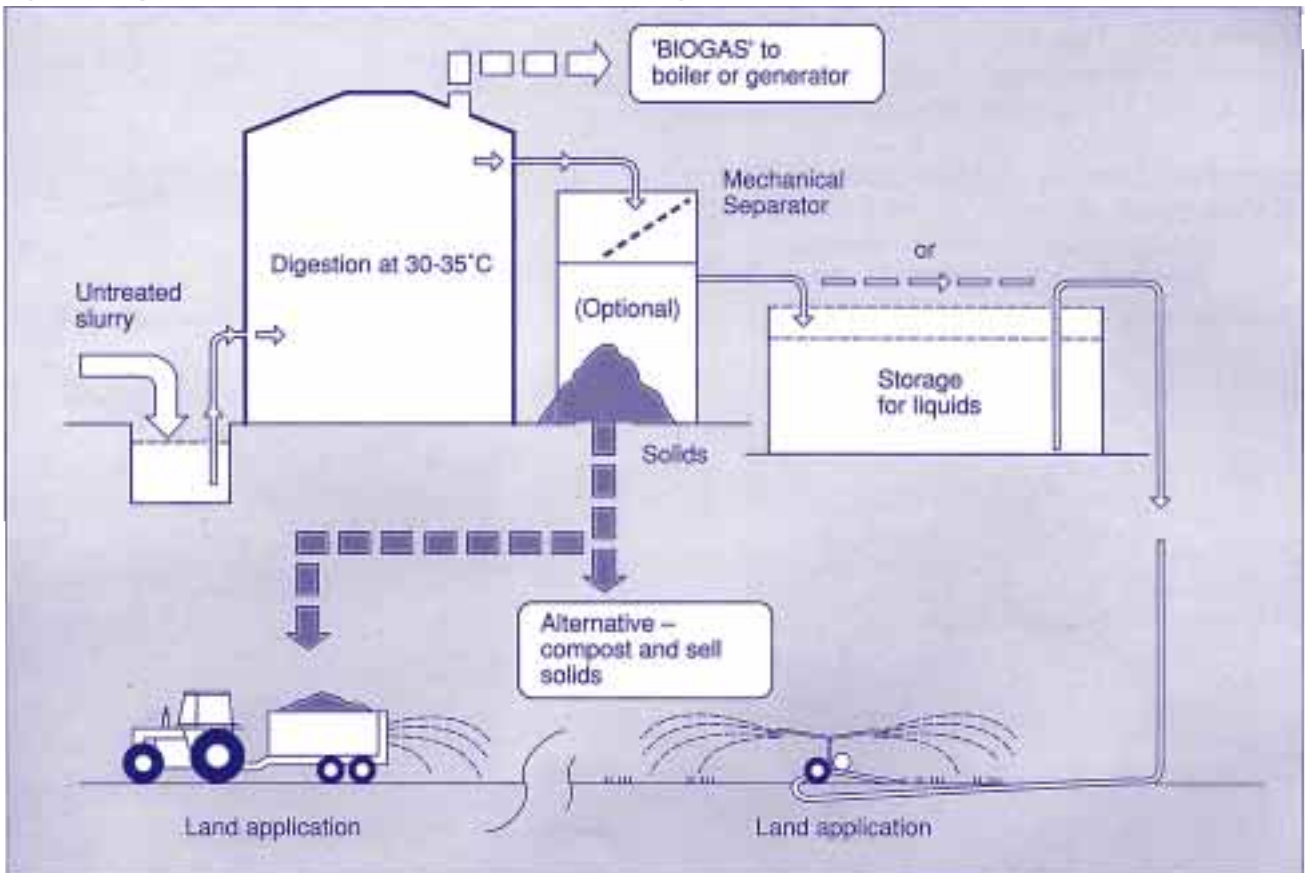

the particular treatment system. Variations in load will alter the retention time; a very large load may flush out the micro-organisms which will lead to treatment failure.

There are two basic methods of treatment: aerobic (with a good supply of oxygen always present) and anaerobic (without oxygen).

**Retention time:**

This is the average time that slurry will stay in the container that treatment takes place in. For continuous flow systems, normal retention time in days is the volume of the treatment vessel divided by volume loaded every day.

**Aerobic treatment (aeration)**

107 Treatment of slurries and farm effluents by aerobic biological treatment systems which are correctly designed and used should be capable of reducing the amount of odour emitted during and after land application by up to 90%.

108 Aerobic treatment is usually only suitable for separated slurry or dilute effluents. Solids in the waste increase the amount of oxygen needed and also increase the energy needed for mixing. The most efficient oxygen transfer occurs when very small bubbles are used. Successful aerators produce these bubbles either by blowing compressed air through porous diffusers with very small outlets, or by entraining air in a fast-moving stream of liquid in submerged ‘venturi’ nozzles or rotating impellers. Aerators should supply a minimum of 1 kg of dissolved oxygen for each kilowatt hour they use, if they are to be economical. The following conditions should be met:

- a reasonably constant and well mixed volume of slurry each day to give controlled retention

time in the treatment tank of continuous flow systems;

- a slurry dry matter content of less than 3%;
- bedding material and animal hair should be kept out of the slurry;
- a suitable oxygen concentration throughout the treatment tank achieved by effective mixing.

109 Most slurries will produce foam when aerated. Extra space should be provided above the slurry in the aeration tank to prevent foam from overflowing. Mechanical devices such as spray nozzles or high-speed rotating discs or impellers can collapse foam and return it to the liquid.

110 Continuous-flow aeration systems can successfully treat slurries to reduce odour nuisance with retention times of as little as one or two days. In these systems, odour can be controlled at the treatment tank or storage tank as well as at spreading. Increasing the retention time during treatment will allow you to store the treated slurry for at least a month or more before the odour returns. If a batch system is used, much of the odour will be driven out into the air above the treatment tank when treatment starts.

**Anaerobic digestion**

111 In a properly designed and run system, the odour emitted during and after spreading anaerobically digested slurry will be reduced by up to 80% and it will be less offensive. The digested slurry can be stored for several months after it has been treated before offensive odours return.

112 Anaerobic digestion of livestock slurries involves using micro-organisms to turn the





complex organic substances into less complex compounds. This process is done in the absence of oxygen and at temperatures normally between 30 and 35°C. The end products of digestion are biogas (a mixture of 60-70% methane and 30-40% carbon dioxide) and a stabilised treated slurry. The biogas may be used for heating or generating electricity. It is not necessary to separate the slurry before treatment. The following conditions should be met:

- a reasonably constant and well-mixed volume of slurry each day to give controlled retention time in the digester;
- a temperature of 30-35°C;
- an optimum dry-matter content of 6-8%;
- an optimum retention time in the digester: 12 days for pig slurry and 20 days for cattle and poultry slurry.

## BIOLOGICAL TREATMENT OF MANURE

### Composting

113 Properly composted manure reduces significantly both the volume which is spread to land and the amount of odour released. But the process of composting can give rise to site odours. Practices which minimise odour emissions are described in Section 8.

114 Composting is an aerobic process. Optimum results are obtained by using well-chopped and mixed ingredients, usually straw and manure in the right proportions, and by controlling temperature and moisture content. Control is easier where heaps are long and narrow (3 to 4 metres), and not too high (1.5 to 2 metres). The amount of aeration to control process temperature (initially at 55-60°C) can be

supplied by either a fan and duct system (called static pile) or by physically moving and turning the heap. The process should be carried out on a concrete yard with proper control of added water and run-off (see paragraphs 123-125).

115 Typical farmyard manure heaps do not satisfy the requirements for thorough composting. For this reason, they can give rise to odours when the heaps are disturbed and when manure is spread to land.

## BIOLOGICAL TREATMENT OF ODOROUS AIR

### Exhaust air from livestock buildings

116 Odorous air can be treated by passing it through an air-cleaning device such as a film or mist of water in an air scrubber. Many systems use a material with a large surface area, which micro-organisms can become attached to. Many odorous compounds are nutrients for the micro-organisms which clean the liquid, so it can be recycled. An alternative biofilter system uses a moist mixture of peat and heather or lightly packed soil.

## TREATING ODOURS BY ADDITIVES AND OTHER METHODS

117 Several kinds of additives are available that act in different ways and which are claimed to control odours. The main ones are: oxidising agents, deodorants which react with odorous compounds, masking agents, biological agents, feed additives and miscellaneous chemicals.

These additives vary in their effectiveness. Current evidence shows that they are not generally a long-term solution to reducing odour problems. However, additives may be useful as a short-term emergency treatment for a batch of slurry or a store which is causing a nuisance.



## Treating Livestock Wastes To Reduce Odour

118 Electrolytic methods are also available for treating slurry. This treatment uses copper electrodes immersed in a treatment tank, and is claimed to reduce odour nuisance.

119 Ask manufacturers or suppliers of additives and other methods to provide independent proof of their product's ability to control odours when it is used according to the manufacturer's instructions.



## Producing Compost For Mushrooms



### Introduction

120 Producing compost for mushroom growing involves mixing ingredients, mainly straw and manure, and adding water. The process can give rise to odours. This section gives advice on the legislation which applies, and on practices which will minimise odour emission.

### Laws

121 Production of compost on which mushrooms will be grown requires an authorisation from the local authority Environmental Health Department, under Part I of the Environmental Protection Act 1990. This will be based on the Secretary of State's Guidance Note on production of compost for mushrooms. This sets out controls and alternative technologies for new and existing processes.

However, any process for the manufacture of compost other than for sale, carried out on a farm or agricultural holding, is exempt from the above legislation. That is to say if compost is produced and used at the same location and by the same grower for growing mushrooms, or produced at one location and transferred to another location for use by the same grower, the process is exempt.

Processes at locations which are exempt are still subject to Part III of the Environmental Protection Act 1990 which relates to statutory nuisances (paragraphs 7-10).

### Good practice

122 In order to minimise the production of odours you should adopt the measures outlined in paragraphs 123-125. A good standard of general management is important. Keep the composting yard and surrounding areas clean

and avoid the ponding of liquids which could give rise to odours.

123 If poultry manure and other manure is stored prior to composting, follow the guidelines given in paragraphs 95-97, in order to prevent it becoming too wet. If practicable, very wet and potentially odorous material should not be accepted or stored at a composting site.

124 To avoid producing odours, encourage as much air as possible to penetrate the material which is being processed. To do this you may have to limit the width and height of windrows or heaps and carefully manage the amount of water applied. Turn compost frequently to minimise anaerobic conditions which will cause odours to be produced.

125 Run-off and leachate which is contained in storage tanks should be aerated by suitable equipment. Spray heads that are used to moisten the compost with leachate should work at low pressures and produce large droplets to reduce drift and possible odour problems.

NOTE: DO NOT LET LEACHATE ENTER WATERCOURSES. GUIDANCE ON HOW TO AVOID WATER POLLUTION IS GIVEN IN THE *WATER CODE*.

## Siting Of Livestock Buildings, Manure And Slurry Stores



### Introduction

126 When you are planning the location of new livestock buildings or waste storage facilities or extensions or alterations to existing structures, it is essential to consider the risk of odours and noise causing nuisance (see paragraphs 7-10). By law you need to get planning permission for livestock buildings and any structures intended to contain slurry or sewage sludge sited within 400 metres of the boundary of protected buildings such as houses or schools.

For livestock buildings, slurry stores and sewage sludge facilities which do not require planning permission under the Town and Country Planning (General Permitted Development) Order 1995, a prior notification system is now in force. You must notify the local planning authority of your intention to construct such facilities. The local planning authority must then decide within 28 days whether it wishes to approve details of the siting, design and external appearance of the proposed development.

You may need an environmental assessment in support of a planning application for large pig and poultry units. The legislation on this subject is described in Part A of this Code (paragraphs 11-13).

### Factors affecting odour problems

127 A number of factors strongly influence the risk of odour problems arising from livestock buildings, manure or slurry stores. These factors include:

- the distance from neighbouring properties and the local topography;
- the number and type of stock;

- the prevailing wind direction in relation to neighbouring properties;
- the management of the livestock and housing system used;
- the type and size of slurry or manure store and the way in which it is managed;
- the type of feed used.

The distance of a site from a potential complainant is very important as odours are diluted in the atmosphere. The longer the distance, the more the odour will be diluted by dispersal. However, distance alone is often not enough to avoid odour nuisance and it is important to take the other factors into account.

128 Good management of livestock housing and manure stores which takes account of the factors outlined in Sections 5 and 6 will reduce potential odour problems.

129 A number of factors have a large effect on the odour concentration downwind and on the direction of dispersal. Strong wind mixes the air and increases dilution, so exposed sites may aid odour dispersal. The frequency and distribution of wind direction and wind speeds can affect the site chosen, so that odours are carried away from housing. You may need specific advice on weather influences such as wind direction, atmospheric stability and odour dispersal.

130 Woodlands and shelter belts can act as barriers and help odour dispersal. Shelter belts and plantations must be correctly laid out with trees spaced to allow 40-50% of the wind to pass through them. Get advice on a suitable layout and the best types of tree to plant.

#### Siting of existing livestock units

131 A large number of existing livestock units and existing waste storage facilities are situated close to houses and similar properties. It is important to follow the advice given in this Code to help reduce potential odour problems in such cases.

Government guidance to local planning authorities requires them to consider carefully applications for new housing development near existing livestock units. Where farmers are made aware of such proposals, they may wish to draw potential odour problems to the local planning authority's attention.

#### Siting new livestock units

132 Building new livestock units and their associated storage facilities in close proximity to housing can cause particular problems. Siting of such new units should take account of the factors outlined in paragraphs 127-130. Paying attention to these factors may also help you to obtain local authority planning approval, when necessary, for the siting of new units.



# **PART C: AMMONIA**



## Ammonia



### Introduction

133 Agriculture is by far the largest source of ammonia emissions in the UK, mainly from slurry and manure. This section describes ammonia gas loss from livestock farming systems and some steps that can be taken to limit the amount lost. Some, though not all, techniques to reduce ammonia loss are similar to those for odour reduction. You should read this section in conjunction with Part B to develop good practices which minimise both ammonia and odour emissions.

134 Although some of the ammonia emitted will be deposited locally, it can travel considerable distances in the atmosphere. Ammonia can cause two major types of environmental damage when it is redeposited on land or water. First, as a source of nitrogen, it can disrupt the balance of some types of vegetation such as heathlands or bogs which exist partly because of naturally low soil nitrogen. This effect is known as eutrophication and can also occur in waters which receive high nutrient levels. The second effect of ammonia is acidification. Although ammonia itself is not an acid, it results in acidity when it reacts in the soil. Excess acid in the soil is damaging to certain types of vegetation.

Trees or other vegetation growing close to a source of high ammonia emissions may suffer direct toxic effects of the gas, leading to damaged foliage and slower growth.


### Ammonia emission

135 Ammonia is formed from the breakdown of urea in animal manures and slurries or uric acid in poultry manures. Most of the available nitrogen in manures is in the form of ammonium-nitrogen. If properly assessed and utilised, it can substitute directly for inorganic

fertilisers. However, ammonia can easily escape as a gas from manures and slurries and this represents a loss of valuable nitrogen as well as causing potentially damaging effects to the environment.

136 Some ammonia gas is likely to be released from manures whenever they come into contact with the air. Sources therefore include, **animal housing** where manures accumulate, **manure and slurry stores** and **manures and slurries applied to the land** (see Figure 6). Ammonia is also released from urine, and perhaps from faeces, in grazed pastures. One of the most important sources of ammonia emissions is the application of slurry to land. This is because spreading is one of the most 'leaky' parts of the manure-handling cycle for ammonia and also, because it is the last stage in the cycle, the benefits of reducing emissions from housing or stores are likely to be lessened if care is not taken when applying manures to land. Significant amounts are also emitted from using nitrogenous fertilisers, particularly urea. There are also some minor emissions from non-agricultural sources.

Figure 6: Ammonia emissions from UK agriculture\*

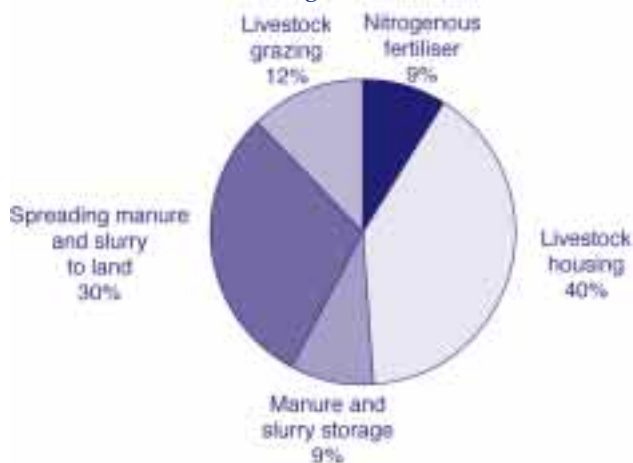

\* Provided by the Institute of Grassland and Environmental Research (1996 data).

137 When investing in new or refurbishing existing buildings and equipment, you may wish to take into account the possibility that reducing ammonia loss might become a requirement in the future.

## REDUCING AMMONIA LOSS FROM MANURES AND SLURRIES

### Animal diets

138 Only about 20-40% of the nitrogen fed to livestock as protein in forage or feed is actually retained in the animal or animal products. The remainder is excreted as urea (uric acid in poultry manure) in urine and faeces; much of it is rapidly converted to ammonia. Increasing the efficiency with which animals or birds convert feed protein into milk, meat and eggs by ensuring that they are not fed more protein than that required (for the target level of production) is a first step in reducing ammonia losses.

139 Matching pig diets more closely with the particular requirements of different growth stages (phase-feeding) may reduce nitrogen excreted. Similar techniques have been developed for the precision feeding of poultry. Low-nitrogen feeds are already available for pigs which may decrease the quantity of nitrogen excreted in manures while maintaining production.

140 Increasing the efficiency of nitrogen use by cattle and sheep is more difficult, but high energy, lower protein feed such as maize silage may be beneficial.

### Housing

141 Livestock buildings are an important source of ammonia emissions. Measurements have shown



that ammonia losses are increased if the walls and floors are constantly covered with urine or layers of faeces. The depth is less important than the surface area. As for odours, the key to low ammonia emissions from animal and poultry housing is the maintenance of high standards of cleanliness.

**142** Removing slurry frequently by flushing or scraping and washing floors will help control ammonia emission from cattle and pig buildings. If you have a scraping and/or flushing system, you should keep it well maintained so that the scrapers do not leave a layer of slurry on the floor and ensure that blocked nozzles do not prevent proper flushing.

For solid manure systems, you should remove dung from non-bedded, concrete areas and transfer it to a store as often as possible.

For poultry, the rapid air-drying of droppings in laying houses and the maintenance of dry crumbly litter in broiler houses will reduce ammonia loss. Managing drinking systems to avoid overflow and spillage will help; for example, by using nipple drinkers.

### Stores

**143** Ammonia loss from slurry stores can be reduced by reducing the surface area of wet material exposed to the air. Some steel slurry tanks can be fitted with lids which may prevent the loss of much of the ammonia as well as reducing odours and other gaseous losses.

**144** Where fitting a lid is not practicable, allowing a crust to form on the slurry or covering with straw or some other floating cover such as rapeseed oil, plastic, or light expanded clay aggregate (LECA) may also reduce emissions from tanks, lagoons or weeping-wall stores. The frequency of stirring the store contents

should be minimised. Every time the contents are stirred ammonia will be lost. Whenever possible fill and empty slurry stores from below the surface to avoid exposing fresh slurry each time.

### Application of manures and slurries to land

**145** Emissions from land application of slurries and manures account for a large proportion of the total ammonia emissions from agriculture. It is very important to try to minimise losses at this stage because any ammonia saved during housing or storage will be lost if it is not controlled by appropriate field application techniques.

**146** Reducing ammonia loss from manures and slurries means more nitrogen is potentially available for grass or crop uptake. You should assess the amount of nitrogen in manures and slurries in order to gain maximum benefit from it. More details on the fertiliser value of organic manures are given in 'Fertiliser Recommendations for Agricultural and Horticultural Crops' (RB 209) MAFF, 1994.

### Slurries

**147** Emissions from slurry applications are strongly influenced by the dry matter content of slurry, the choice of application method and the soil and weather conditions at the time. Infiltration of slurry into the soil reduces ammonia emission. The higher the dry matter content the greater the ammonia emission from slurries, so dilution is a good way of reducing losses, provided you have the storage and spreading facilities to handle the extra volume and soil conditions favour rapid infiltration.

**148** Application methods such as injection (see paragraphs 47-49 and Figure 3) or band-spreading, which minimise the surface area

exposed to the air, generally result in lower emissions. Estimates based on recent research indicate that open-slot injection can reduce ammonia emissions by an average of 60% on UK farms compared to conventional spreaders. Techniques which produce a closed-injection slot are more effective. However, not all land is suited to injection. For example, the technique is not appropriate on steeply sloping, stony or wet soils.

Band spreaders (see paragraph 46 and figure 2) have been shown to be more effective than splash-plate spreaders but less effective than injection for reducing emissions.

149 Rainfall, wind speed and air temperature all influence ammonia emissions from slurries spread to land. The effects of rainfall are dependent on soil type and soil wetness. In general, emissions will be reduced if slurry is applied on cool, still days. Application during, or prior to, rainfall may also reduce emissions provided the soil is free-draining and there is no risk of causing water pollution.

#### Solid manures

150 Ammonia emissions from solid manures can be reduced when they are applied to bare soil by incorporating beneath the soil surface. Most of the ammonia is emitted within a few hours of spreading so, to be effective, incorporation should take place within 24 hours of spreading and, where practicable, within four hours.

# **PART D: SMOKE POLLUTION**



## General Principles



151 This part of the Code deals with the risk of causing air pollution by smoke from the burning on agricultural and horticultural premises of carcasses and waste materials arising from agriculture.

In agriculture, dark smoke and smoke nuisance are most frequently caused by burning waste materials in the open or in unsuitable equipment.

152 The disposal of waste produced on premises used for agriculture is not currently subject to control under the waste management licensing system, but certain agricultural wastes will be brought within the licensing system in future regulations (see paragraph 19). This will lead to some changes in the guidance within this part of the Code.

153 Under the Clean Air Act 1993 it is an offence to burn any material which produces dark smoke unless an exemption applies (paragraphs 14-16). Part III of the Environmental Protection Act 1990, which relates to statutory nuisances, also applies (paragraphs 7-10). Certain prescribed processes are subject to specific controls under the Environmental Protection (Prescribed Processes and Substances) Regulations 1991 (paragraph 18).

154 Minimise the need to burn waste materials on the farm by:

- First: reducing the use of materials if possible;
- Second: reusing or recycling materials where appropriate;
- Third: recovering energy or nutrients from the materials where appropriate;
- Fourth: using alternative environmentally acceptable methods of disposal wherever this is practicable, as set out in Sections 13-18.



155 Where burning cannot be avoided, Sections 13-19 give advice on methods of burning which reduce the risk of producing dark smoke or smoke nuisance.

**Dark smoke**

Smoke is finely divided particles of matter suspended in the air as a visible cloud. Dark smoke can arise from incomplete combustion of organic compounds.

Dark smoke production will be avoided if the temperature is high enough for ignition and if enough oxygen is available to keep the material burning at this temperature for long enough for combustion to be completed.

156 Make regular and frequent assessments of the appearance and odour of smoke produced when burning waste materials in the open. If dark smoke is emitted at any time, or if the smoke is likely to cause a nuisance, take action immediately to put the problem right.

**Measuring dark smoke**

The darkness of smoke from chimneys can be measured by comparing its shade with a graduated scale. For the purpose of this Code, the Ringelmann Chart should be used as described in British Standard 2742: Use of Ringelmann and Miniature Smoke Charts. This scale starts at 0 and increases up to a maximum of 5. Dark smoke is defined as 2 or more on the Ringelmann Chart and represents 40% obscuration.

## Reducing The Volumes Of Waste Materials For Disposal



### Reducing waste

- 157 Using materials, packaging and equipment carefully can extend their useful life and reduce the amount of waste produced. Using suitable machinery and regularly maintaining it will reduce wear and prolong the useful life of items such as tyres.

Take waste disposal into account when choosing products to bring on to the holding. Wherever practicable, choose those methods, equipment and husbandry practices which give extended life and produce relatively low amounts of waste for disposal.

### Recycling

- 158 You should minimise waste on the holding by reusing materials wherever practicable. Some wastes can also be recycled by specialist operators. For this, different waste materials usually need to be sorted out, then stockpiled in good condition for them to be collected or delivered to the operator. Some local authorities and commercial companies also run recycling programmes.
- 159 Recycling straw by processing it into added-value products can also be considered as good practice as long as the processes are controlled to avoid causing water pollution and producing odours and harmful gases.

### Ease of disposal

- 160 If packaging and disposable materials for crop protection, mulching or crop storage are brought onto the holding, you should consider how easy it is to dispose of the waste. If possible, choose materials which can be disposed of safely and economically without burning them. Consider using materials which biodegrade after they have been used.



## Reducing The Volumes Of Waste Materials For Disposal

161 Only burn materials which cannot practicably be disposed of in any other way, which burn easily and which do not produce dark smoke or poisonous by-products when burnt under suitable conditions.

162 Ask the Environment Agency about facilities for the disposal and collection of difficult wastes.



## Plastic Materials



### Introduction

163 Do not burn plastics in the open on agricultural holdings because this can cause large amounts of dark smoke and poisonous by-products which can be extremely harmful to health.

164 If you burn plastics in an incinerator, the installation may require authorisation by the local authority under Part I of the Environmental Protection Act 1990 (paragraph 203).

### Repeated use of plastics

165 Consider reusing plastic materials on the farm or holding. If an item can be used several times before it becomes unserviceable, the quantity of material which needs to be disposed of will be greatly reduced.

166 To maximise recycling, take care when handling and using plastics. Use suitable equipment and methods of handling to make sure that the plastic item is not damaged. Carefully reclaim and reuse items such as crop covers for mulching.

### Alternative uses

167 If a plastic material cannot be reused for its original purpose, try hard to make use of it for other things. However, never use containers that have held agricultural chemicals and persistent, poisonous or harmful substances for any other purpose. (See the *Code of Practice for the Safe Use of Pesticides on Farms and Holdings*).

### Recycling

168 Recycle polythene materials using specialist recycling companies. Suitable items include:

- silage wrapping, bags and sheets;
- polythene inners from fertiliser ‘big bags’;
- 50 kg fertiliser sacks;
- pallet covers;
- polythene covers from greenhouses.

169 Materials for recycling should be clean and free from soil. Keep different types of items separate. Store the material in one safe place ready to be collected.

### Choosing materials

170 When choosing plastic materials to use in crop husbandry, if recycling is not practicable, then choose those materials which are biodegradable. Biodegradable plastic materials are likely to be unsuitable for recycling.

171 If plastic items such as plant pots or trays are reused, their life can be increased by choosing more durable products. This reduces waste. If returnable items are thrown away because of their appearance, using a more durable type of plastic, a different colour or different type of returnable container may enable each unit to be used more times.

172 Save plastics which cannot be recycled and dispose of them to licensed landfill sites, or authorised incinerators.

### Containers contaminated by pesticides

173 The *Code of Practice for the Safe Use of Pesticides on Farms and Holdings* gives details of preferred disposal methods and all precautions to take when disposing of or burning these containers. The Code has a statutory basis under Part III of the Food and Environment Protection Act 1985 and should be read by all farmers.

Under the Clean Air (Emission of Dark Smoke) (Exemption) Regulations 1969, dark smoke emitted by the burning of containers which are contaminated by any pesticide or by any toxic substance used for veterinary or agricultural purposes is exempt from the prohibition in Section 1 of the Clean Air Act 1993 **provided that the following conditions are satisfied.**

- There is no other reasonably safe and practicable method of disposing of the matter.
- The burning is carried out in such a manner as to minimise the emission of dark smoke.
- The burning is carried out under the direct and continuous supervision of the occupier of the premises concerned or a person authorised to act on his behalf.

**There are few circumstances where other practicable methods of disposal cannot be found.** Many specialist waste contractors now offer well-managed disposal services.

Part III of the Environmental Protection Act 1990, which relates to statutory nuisances, also applies if you do resort to burning (paragraphs 7-10).

## Tyres And Rubber



### Dark smoke risk

174 Rubber tyres produce large amounts of dark smoke and may give off poisonous substances when burnt in the open. Do not burn tyres and other rubber materials on agricultural holdings.

175 Ask tyre suppliers to take away old tyres from the premises when new ones are fitted to agricultural machinery.

### Disposal off the farm

176 Dispose of large numbers of tyres to specialist waste removal operators or contractors. Small quantities of tyres may be accepted by licensed local authority sites, but you may need to get special permission from the site operator.



## Waste Oils

### Sources

- 177 Waste oil comes from the servicing of agricultural machinery. The main types of waste oil are used lubricating oil from engines and oil from hydraulic systems.

### Recycling

- 178 Collect used oil drained from machinery during routine servicing and store it in suitable leak-proof containers. Store surplus oil in a central store, preferably banded and secure from vandals, and dispose of it to waste oil dealers. Different types of oil should be kept separate. Do not tip waste oil onto land or vegetation.

NOTE: NEVER DISPOSE OF WASTE OIL INTO SOAKAWAYS, WATERCOURSES, DRAINS OR SEWERS AS IT CAN CAUSE SERIOUS WATER POLLUTION.



### Waste oil burners

179 You can burn waste oils for heating on farms provided that you obtain approval for the installation of the burner to be used from the local authority Environmental Health Department. Under Part I of the Environmental Protection Act 1990, such burners must comply with the Secretary of State's Guidance Note for waste oil burners less than 0.4 MW and waste oil or recovered oil burners less than 3 MW net rated thermal input (paragraph 18).

NOTE: The design and construction of new or substantially enlarged or reconstructed storage facilities for storing more than 1500 litres (330 gallons) of oil to be burnt for agricultural purposes must comply with the Control of Pollution (Silage, Slurry and Agricultural Fuel Oil) Regulations 1991 (as amended). The *Water Code* gives further advice.

## Animal Carcasses

### Introduction

180 There are a number of ways to dispose of animals and poultry that die on the farm. The best way is to send them to a licensed knacker's yard or hunt kennel, authorised incinerator or rendering plant. If a notifiable disease is involved, disposal is subject to the State Veterinary Service animal health controls.

181 Disposal methods on the farm, such as burial, incineration or burning in the open may cause water or air pollution, particularly if they are not done correctly.

182 The *Water Code* gives advice on how to avoid causing water pollution from burying carcasses. Consult the Environment Agency if there is any doubt over the suitability of a proposed burial site.

Never dispose of carcasses in or near watercourses, boreholes or springs. Apart from being prosecuted for causing water pollution, there is a serious risk of spreading disease to animals on neighbouring farms.

### Notifiable diseases

183 If you think that a notifiable disease has caused ill health or death you must report it to the Divisional Veterinary Manager at the local Animal Health Office of the Ministry of Agriculture Fisheries and Food or Welsh Office Agriculture Department. Carcasses should be available for post-mortem examination in these cases. Always consider the possibility of anthrax if death is sudden or unexplained.

### Incineration


184 If animal carcasses are burnt on farm it should be done in an incinerator wherever possible.

The incinerator used should be fitted with a secondary combustion chamber so that high temperatures can be achieved throughout incineration to give complete combustion of all products. Get advice about siting, choosing, installing and running incinerators, chimneys, associated buildings and carcass storage facilities.

If you intend to install an incinerator designed for, or to be operated at, loading rates of more than 50 kg/hour, you must first get approval for the installation of the appliance in question from the local authority Environmental Health Department under Part I of the Environmental Protection Act 1990. It must comply with the Secretary of State's Guidance Note on animal carcass incineration processes under one tonne per hour (paragraph 18).

For units with a loading rate of less than 50 kg/hour, the Clean Air Act 1993 which prohibits the emission of dark smoke from chimneys and Part III of the Environmental Protection Act 1990 which relates to statutory nuisances still apply (paragraphs 7-10 and 14-16).

185 Incinerate dead animals as soon as possible. Do not exceed the design loading rate of the incinerator at any time.

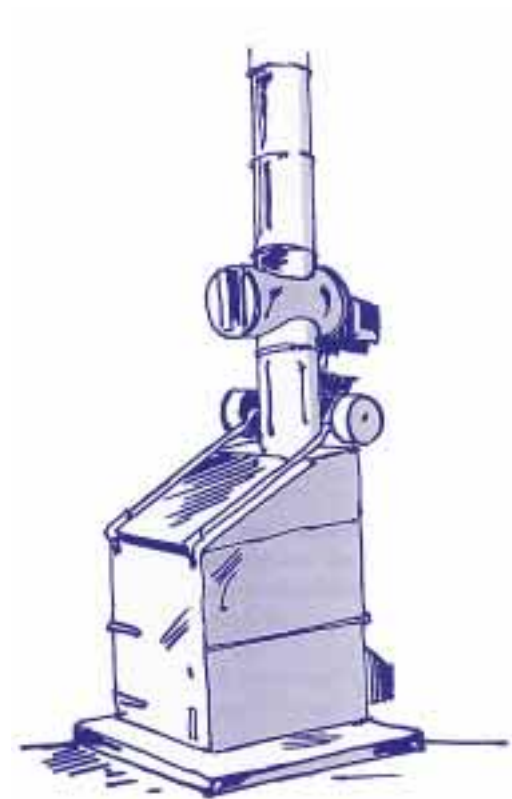

### Open burning

186 Using suitable on-site incineration equipment is strongly preferred to open burning.

187 Under the Clean Air (Emission of Dark Smoke) (Exemption) Regulations 1969, emission of dark smoke, caused by the burning of carcasses of animals or poultry which:

- have died or are reasonably believed to have died because of disease;
- or have been slaughtered because of disease;
- or have been required to be slaughtered under the Animal Health Act 1981;

is exempt from the prohibition in Section 1 of the Clean Air Act 1993, provided that:

- there is no other reasonably safe and practicable method of disposing of the matter;
- **and** the burning is carried out under the direct and continuous supervision of the occupier of the premises concerned or a person authorised to act on their behalf.

The Environmental Protection Act 1990, Part III, which relates to statutory nuisances, still applies (paragraphs 7-10).

If burning is essential, follow the general precautions on open burning given in paragraph 214. A shallow pit should be dug with cross trenches to provide a good air supply to the base of the fire. Use only dry fuels which are not likely to produce dark smoke and which burn easily. Do not use tyres or liquids as a fuel and do not use the fire to dispose of other materials not recommended for burning. Gas-fired equipment may be used to start the fire. Place the primary fuel in the base of the fire and place the carcasses on top. Use enough fuel to ensure that the carcasses are completely burned. Do not overload the fire with carcasses. Burning should begin as early in the day as possible.



## Fuels Produced On The Farm



### Introduction

188 Straw and other crop residues can be used as animal feed, for animal bedding and, where markets exist, for paper pulp and for manufacturing board. Excess amounts of straw can be sold to other agricultural holdings or to straw merchants. Residues can be mixed into the soil. Generally the burning of crop residues is banned, unless specifically exempted by the legislation (see paragraph 204).

### Straw and wood as fuels

189 Straw is a useful energy source and may provide a cost-effective and environmentally acceptable fuel for furnaces that are designed to burn it. Other crop residues, wood and litter from stock can also be used as alternative fuels.

### Choosing equipment

190 Straw- or wood-fuelled furnaces should be properly designed for the purpose and have facilities to give adequate control over combustion to prevent the production of dark smoke. If units of over 400 kW (0.4 MW) net rated thermal input are used, you must obtain approval for the installation of the appliance in question from the local authority Environmental Health Department under Part I of the Environmental Protection Act 1990. It must comply with the requirements of the Secretary of State's Guidance Notes on combustion of fuel manufactured from, or comprised of, solid wastes in applications between 0.4 and 3 MW net rated thermal input (see Appendix II).

Chimney height approval may be required under Section 14 of the Clean Air Act 1993 for furnaces outside local authority authorisation.

191 Equipment with a thermal input of less than 400 kW (0.4 MW) is still subject to the provisions of the Clean Air Act 1993 which prohibits the emission of dark smoke from chimneys (paragraphs 14-16). Part III of the Environmental Protection Act 1990, which relates to statutory nuisances, also applies (paragraphs 7-10).

#### Using and maintaining equipment

192 Efficient burning of fuel will prevent the production of dark smoke. It is important to choose suitable equipment and operate it correctly. Automatic fuelling equipment that is properly set up and maintained can provide the most stable operating conditions and will automatically provide the heat that is needed at any particular time.

193 Many boilers and heaters have a large chamber and are designed to burn a single charge of fuel. These units should be designed so that the supply of primary and secondary air can be controlled to give efficient burning of the large charge of fuel without producing dark smoke.

194 Do not try to prolong the burning of a large charge of fuel by reducing the air supply. This will give inefficient combustion and cause dark smoke. With large charge boilers, if heat is needed over a long period, they should be used in conjunction with water-based thermal storage systems or the boiler itself should have a large water content so that it stores the heat.


195 To avoid producing dark smoke, only burn fuels that the burner is designed for and which are recommended by the manufacturer. Do not burn animal carcasses, plastics, tyres or other rubber materials in straw or wood burners. Store fuel for the burner under cover. Always make sure that the fuel is dry. Adjust the primary and secondary air supply to give

efficient combustion and minimum dark smoke emission.

196 Get burning equipment cleaned and serviced regularly. Scrape or brush internal heat-transfer surfaces to keep them in a clean condition and free from char and other deposits. Do not carry out uncontrolled burning of a charge of fuel in the furnace to remove deposits of char from the internal surfaces of the boiler, as this is likely to produce dark smoke.

#### Using litter from poultry and other animals as a fuel

197 If litter from poultry or animals is to be used as a fuel in heating appliances for space heating or agricultural processes, specialised equipment designed for this type of fuel should be used. Automatic fuelling should be part of the system. Air supply for primary and secondary combustion should be controlled to give high combustion efficiency.

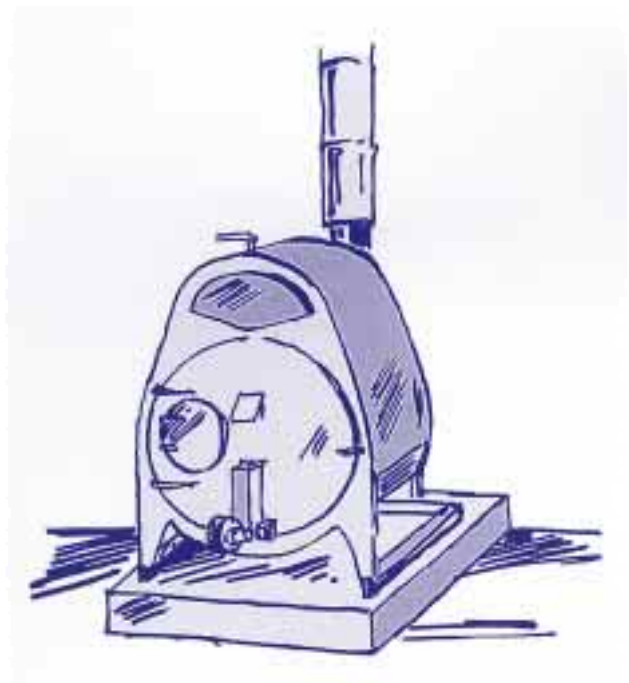



- 198 The plant should be operated in a way which minimises the emission of dark smoke. Monitoring the appearance and smell of the flue gases should be carried out at least once a day.
- 199 If a unit of over 400 kW (0.4 MW) net rated thermal input is used you must get approval for installation of the appliance in question from the local authority Environmental Health Department under Part I of the Environmental Protection Act 1990. It must comply with the requirements of the Secretary of State's Guidance Note on combustion of fuel manufactured from or comprised of solid wastes in applications between 0.4 and 3 MW net rated thermal input (see Appendix II).
- 200 Equipment with a thermal input of less than 400 kW (0.4 MW) still comes under the provisions of the Clean Air Act 1993 which prohibits the emission of dark smoke from chimneys (paragraphs 14-16). Part III of the Environmental Protection Act 1990, which relates to statutory nuisances, also applies (paragraphs 7-10).
- 201 If you wish to install heating systems fuelled by straw, wood or animal litter heating systems you will normally need professional help to design such an installation.



## Other Waste Materials

### Introduction

202 Under the Clean Air Act 1993, it is an offence to burn waste materials if the burning produces dark smoke (paragraphs 14-16). Part III of the Environmental Protection Act 1990, which relates to statutory nuisances, also applies (paragraphs 7-10).

203 If waste materials are to be burnt in an incinerator which is designed or operated at rates of more than 50 kg/hour, you must get approval for the appliance in question from the local authority Environmental Health Department, under Part I of the Environmental Protection Act 1990. It must comply with the Secretary of State's Guidance Note on general waste incineration processes under one tonne per hour.

### Crop residues

204 The burning of cereal straw and stubble, the residues of oilseed rape, field beans and peas harvested dry is banned by the Crop Residues (Burning) Regulations 1993, except in very limited circumstances, e.g. for disease control where a plant health order has been served. When crop residues are burnt under an exemption or where linseed residue is burnt, the Regulations set out requirements about:

- the area to be burned;
- firebreaks;
- distances from vulnerable objects such as trees, hedges, buildings;
- days of the week and times for burning;
- supervision and other safety requirements;

- notifying relevant authorities and neighbours;
- incorporating ash after burning.

Guidance Notes on the Regulations were issued to all farmers in England and all cereal producers in Wales in 1993.

**205** The Clean Air Act 1993, the Health and Safety at Work etc. Act 1974, the Highways Act 1980 and the Environmental Protection Act 1990 also apply.

**206** Burning of broken straw bales and the residues of other minor crops are not covered by the Regulations. If you do need to burn these residues, you should still follow the guidance in paragraph 204.

#### Wood waste

**207** Wood waste is produced during forestry operations, orchard pruning, demolition of buildings, estate maintenance, and building construction and maintenance.

**208** Larger items of timber and waste wood can be used as firewood. Therefore, it is preferable to process these into burnable lengths for domestic use or dispose of them to specialist dealers in this material. Arrangements with contractors for forestry work and woodland clearance should include an agreement for the disposal of any waste wood that is produced.

**209** Trimmings from woodland or orchard pruning may be converted to wood chips where practicable. If they have to be burned, follow the guidance in Section 17.

**210** Under the Clean Air (Emission of Dark Smoke) (Exemption) Regulations 1969, emission of dark smoke caused by the burning of timber and any other waste matter (other than natural

or synthetic rubber, or flock or feathers), which results from the demolition of a building or clearance of a site in connection with any building operation or work of engineering construction (within the meaning of Section 176 of the Factories Act 1961), is exempt from the prohibition in Section 1 of the Clean Air Act 1993, provided that the following conditions are satisfied:

- there is no other reasonably safe and practicable method of disposing of the matter;
- **and** the burning is carried out in such a manner as to minimise the emission of dark smoke;
- **and** the burning is carried out under the direct and continuous supervision of the occupier of the premises concerned or a person authorised to act on his behalf.

If in doubt, get advice from the Environmental Health Department of the local authority before burning any waste.



### Paper sacks and other packaging

211 Where practicable, paper sacks and other packaging that are not contaminated by pesticides should be stockpiled and sent for recycling, for example to a board mill. If recycling is not possible, burn paper sacks carefully in small quantities as long as this does not cause a nuisance (paragraphs 7-10).

### Litter from poultry and other animal litter

212 Because litter from poultry or other animals varies in its moisture content and composition, it is difficult to burn except under closely controlled conditions. Uncontrolled burning will produce dark smoke and odour. Therefore, do not burn poultry and animal litter in the open.

## Burning In The Open



### Good practice

213 Under the Clean Air Act 1993, it is an offence to burn any material in the open on trade premises if the burning produces dark smoke (paragraphs 14-16). Part III of the Environmental Protection Act 1990, which relates to statutory nuisances, also applies (paragraphs 7-10).

214 If burning in the open is the only practicable method of disposal, take the following precautions to prevent producing dark smoke and causing a nuisance.

- Do not burn plastics, rubber, tyres or other materials known to produce dark smoke.
- Avoid burning if it will cause a nuisance to nearby residential areas.
- Materials should be dry and have a low moisture content. Do not burn green vegetation.
- Keep fires small and continually add combustible material, minimising the depth of the combustion area. Do not pile material high on fires.
- Minimise the quantity of incombustible material which is added to the fire. Wherever possible keep incombustible materials separate from the materials to be burnt.
- For better combustion, agitate the base of the fire to improve the air supply.
- If a fire produces dark smoke, don't add any more material that burns slowly.

### Safety precautions

215 Also take the following precautions to minimise fire hazard.

- Build fires well clear of houses, other buildings, overhead cables or flammable materials such as stacks of straw, trees, hedgerows, ripe cereals or stubble.
- Fires must not be lit near a public road. If the fire, or smoke from it, causes injury, interruption or dangers to road users, this may be an offence under the Highways Act 1980.
- Do not burn materials in the open when it is very windy or in a period of drought.
- Only light fires downwind of public highways, houses, other buildings or inflammable materials, so that the wind will carry any sparks and smoke away from them.
- Tell the local authority Fire Service before starting any substantial burning operations.
- Have a fire extinguisher and a supply of water from a mains supply or bowser on hand in case of an emergency.
- Burning should be carried out under direct and continuous supervision of the occupier of the premises or a person authorised to act on their behalf. The only exception to this should be if there is an emergency elsewhere on the farm requiring immediate attention.
- Put out all fires before you leave them.



# **PART E: GREENHOUSE GASES**



## Greenhouse Gases



### Introduction

216 This section describes the greenhouse gases emitted by agricultural systems and some steps which can help limit the amount of gases that are released.

217 Climate change is one of the biggest environmental problems now facing the world. The sun is the earth's source of heat. Some of the sun's energy is absorbed by the surface of the earth. In turn, the earth radiates the energy back into space as infra-red radiation. Some of the gases in our atmosphere can absorb this infra-red radiation, and so prevent it leaving the earth and its atmosphere. This acts as a blanket and makes the earth warmer. This is similar to the effect of glass in a greenhouse, which lets the sunlight in but stops some of the radiated heat from escaping. The gases which cause this effect are therefore called greenhouse gases. Most of these occur naturally in the atmosphere, and produce a natural greenhouse effect which keeps the temperature of the earth about 30°C higher than it would otherwise be.

### The greenhouse gases


218 The most important greenhouse gases are water vapour, carbon dioxide, methane, nitrous oxide, and a group of man-made gases such as chlorofluorocarbons (CFCs). All the major gases have natural sources, but human activity increases the amount released. It is believed that this pollution has added to the natural greenhouse effect and will cause the temperature of the earth's surface to rise. This could have major effects on the world; for example, changes in sea level could cover low-lying coasts, and changes in climate and weather could damage agriculture and natural systems. Because some of the greenhouse gases last for a long time in the atmosphere, it is important that any action to reduce

emissions of greenhouse gases is taken as early as possible.

The UK has signed an international agreement to return its greenhouse gas emissions to 1990 levels by 2000 and international negotiations are underway to set a series of further reduction targets for the years beyond 2000.

Figure 7 shows the relative importance of the three main greenhouse gases emitted by UK agriculture. In terms of global warming, methane is 21 times more powerful than carbon dioxide, and nitrous oxide is 310 times more powerful than carbon dioxide over a 100 year period. The amount of carbon dioxide produced as a by-product of fertiliser manufacture in the UK is shown, but this carbon dioxide is not produced directly by agriculture. Agriculture produces about 1% of the carbon dioxide released in the UK (as a result of fossil fuel use), 28% of the methane and 58% of the nitrous oxide. Agriculture therefore accounts for about 8% of total UK global warming emissions.

Figure 7: Greenhouse gas emissions from UK

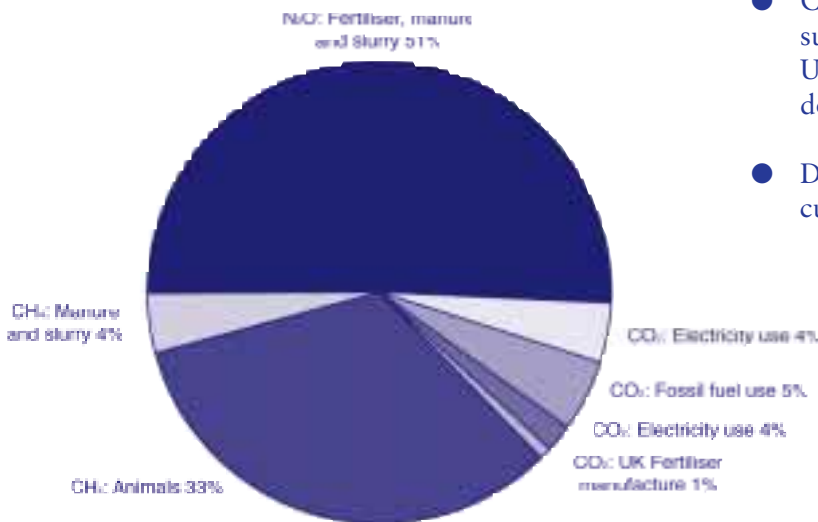

\*Contribution of methane (CH<sub>4</sub>), carbon dioxide (CO<sub>2</sub>), and nitrous oxide (N<sub>2</sub>O) to global warming potential. Derived from the National Atmospheric Emissions Inventory 1994.

### Reducing emissions

219 As industrial emissions of greenhouse gases reduce, attention will turn to agricultural sources. This is particularly the case for methane and nitrous oxide because agriculture contributes significantly to national emissions of these gases. There are some methods that farmers can use to reduce the amount of greenhouse gas emitted, many of which will also save money.

### Carbon dioxide

220 The most effective way of reducing carbon dioxide emissions is to use energy more efficiently and to exploit alternative non-fossil fuels as sources of energy. Improvements in energy efficiency can reduce farm running costs. The following are important.

- Maintain engines by following the manufacturers recommendations. A reduction of 5-15% in fuel consumption can be obtained by servicing air cleaners and fuel injectors regularly.
- Choose tractors and machinery that are suitable for the tasks they will be performing. Use the lowest powered tractor capable of doing the required job.
- Do not make unnecessary journeys and cultivation passes.

- Maintain fixed equipment such as grain driers, refrigerated stores and bulk milk tanks in good condition and operate them efficiently.
- Reduce heat loss from heated buildings. Unintentional ventilation of buildings can waste a lot of heat. Effective insulation of walls, roofs, and heating pipes can significantly reduce the amount of heat that is lost.
- Heated glasshouses, mushroom houses and polythene covered structures are major users of energy. Economise on fuel by precise control of the correct temperature regimes, using thermal screens and correct maintenance of boilers and burners.
- Consider the use of energy sources which are not fossil fuels. There are opportunities for using alternative energy sources, such as solar heating, heat pumps, straw-burning boilers, biogas from manure digestion, wind and water power. These techniques may be cost effective especially when the amount of energy needed is consistent through the year. Each project needs firstly to be critically assessed for its capital, management and running costs. Further details of some of these possibilities are given in Section 17.

There are also potential commercial opportunities to sell the energy from alternative sources. Under the Non-Fossil Fuel Obligation, electricity supply companies are required to buy a proportion of their electricity from alternative energy sources.

- Large amounts of fossil fuel are needed to manufacture nitrogen fertilisers. Fertilisers should only be used at the rates suitable for the cropping situation. When calculating application rates, take into account any organic manures or sewage sludge applied to the land. Make sure that fertiliser spreaders are properly

maintained and use suitable settings for different types of fertiliser.

221 As well as by using fossil fuels, agriculture also contributes carbon dioxide from the breakdown of liming materials in the soil. Limestone is composed of calcium carbonate which releases fossilised carbon dioxide into the atmosphere as it neutralises acidity in the soil. Historic changes in land-use have also resulted in the release of carbon dioxide. Further emissions can be minimised by avoiding the cultivation of land that has never been cultivated, by avoiding conversion of pasture to arable land, and by protecting peat soils from degradation caused by drainage and cultivation.

222 It is important not to confuse the permanent release into the atmosphere of fossilised carbon from fossil fuels and limestone with the carbon dioxide that is recycled within agriculture and the human and animal food cycle. As crops grow, they absorb carbon dioxide from the atmosphere, but a similar amount is released to the atmosphere when the crop products are used as food for animals or people; this part of agriculture is not considered a net consumer of carbon dioxide.

### Methane

223 Methane is emitted by farm animals and the excreta they produce. Direct losses of methane from animals are due to fermentation caused by bacteria in the stomach. Cows produce the most methane per animal, followed by horses, sheep, goats and pigs. Emissions from lactating dairy cows are particularly high due to their greater energy demands. In contrast, poultry do not produce any methane directly, although a small amount can be released from their excreta. Research is being carried out on modified diets for livestock to reduce emissions, although it is

unlikely that these will result in significant reductions in the near future.

224 A small amount of methane from agriculture is released by bacteria in slurry and manure. This is the natural but much slower equivalent of the process which occurs in anaerobic digestion (see paragraph 112). Methane produced from controlled anaerobic digestion should be used efficiently as an energy source.

SAFETY NOTE: METHANE IS HIGHLY FLAMMABLE

#### Nitrous oxide

225 Nitrous oxide from agriculture is released from nitrogen compounds in manures, fertilisers, crops, and soils and watercourses. It is likely to be produced in oxygen-free conditions. The most effective ways for farmers to reduce releases of this gas are to use nitrogen fertiliser and manures efficiently so that crop requirement is met while losses of nitrogen are minimised. Nitrogen in animal diets should be matched to animal requirement.

#### Chlorofluorocarbons (CFCs)

226 Apart from their effect as greenhouse gases, CFCs also damage the ozone layer. This allows more of the sun's ultraviolet-B radiation (UVB) to reach the earth's surface. This could have important economic and health effects, such as increasing skin cancer, as well as damaging crops, farm animals and wildlife.

227 CFCs are used in refrigeration equipment. Keep refrigeration equipment properly maintained to minimise the risk of leaks of refrigerant. Whenever such equipment is serviced, make sure that no refrigerant is lost. Do not allow unused equipment to deteriorate on site. Get a

specialist contractor to take away the equipment and safely remove the refrigerant, so that it can be recycled or destroyed.


#### Halons

228 Halons (chemicals similar to CFCs) also damage the ozone layer. They are often found in fire extinguishers for use on electrical fires. Avoid releasing the gas from such extinguishers unnecessarily. When they reach the expiry date marked on them, or have been partly used, dispose of them through the manufacturer or a specialist contractor so that the halon can be recycled or destroyed.

# APPENDICES

## Appendix I

### ENVIRONMENT AGENCY: CONTACT DETAILS

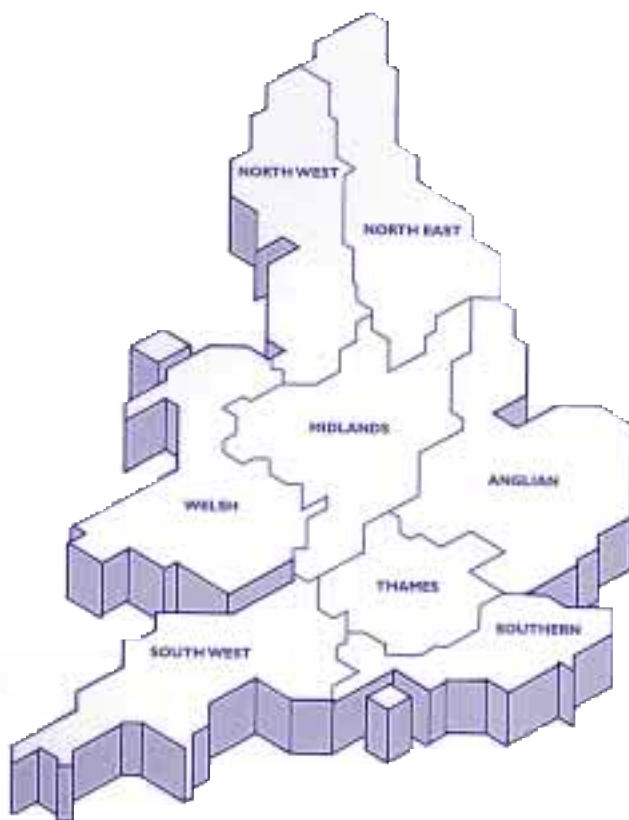

**HEAD OFFICE**  
Rio House  
Waterside Drive  
Aztec West  
Almondsbury  
Bristol BS12 4UD  
Tel: 01454 624400  
Fax: 01454 624409

**ANGLIAN**  
Kingfisher House  
Goldhay Way  
Orton Goldhay  
Peterborough PE2 5ZR  
Tel: 01733 371811  
Fax: 01733 231840

**NORTH EAST**  
Rivers House  
21 Park Square South  
Leeds LS1 2QG  
Tel: 0113 244 0191  
Fax: 0113 246 1889

**NORTH WEST**  
Richard Fairclough House  
Knutsford Road  
Warrington WA4 1HG  
Tel: 01925 653999  
Fax: 01925 415961

**MIDLANDS**  
Sapphire East  
550 Streetsbrook Road  
Solihull B91 1QT  
Tel: 0121 711 2324  
Fax: 0121 711 5824

**ENVIRONMENT  
AGENCY GENERAL  
ENQUIRY LINE**  
Tel: 0645 333 111

**ENVIRONMENT  
AGENCY  
EMERGENCY  
HOTLINE**  
Tel: 0800 807060

**SOUTHERN**  
Guildbourne House  
Chatsworth Road  
Worthing  
West Sussex BN11 1LD  
Tel: 01903 832000  
Fax: 01903 821832

**SOUTH WEST**  
Manley House  
Kestrel Way  
Exeter EX2 7LQ  
Tel: 01392 444000  
Fax: 01392 444238

**THAMES**  
Kings Meadow House  
Kings Meadow Road  
Reading RG1 8DQ  
Tel: 01189 535000  
Fax: 01189 500388

**WELSH**  
Rivers House/Plas-yr-Afon  
St Mellons Business Park  
St Mellons  
Cardiff CF3 0LT  
Tel: 01222 770088  
Fax: 01222 798555



## Appendix II

### Sources of information

#### Legislation: general and odours

Animal Health Act 1981, SI 1981, Chapter 22, HMSO (ISBN 0105422819)

Control of Pollution (Silage, Slurry and Agricultural Fuel Oil) Regulations 1991 (amended) SI 1991, No 324, HMSO (ISBN 0-11-013324-2) as amended by the Control of Pollution (Silage, Slurry and Agricultural Fuel Oil (Amendment)) Regulations 1997 SI 1997, No 547, The Stationery Office (ISBN 0110640497)

Environment Act 1995, HMSO (ISBN 0105425958)

Environmental Protection Act 1990, Chapter 43, HMSO (ISBN 0 10 544390 5)

Factories Act 1961 Chapter 34, HMSO

Food and Environment Protection Act 1985 HMSO (ISBN 0-10-544885-0)

Greenhouse Gases. Refrigeration and air conditioning CFC Phase-out, Advice on Alternatives and Guideline for Users Department of Trade and Industry (DTI/Pub/1147/4K/1194)

Health and Safety at Work etc. Act 1974 Chapter 37, HMSO (ISBN 0105437743)

Highways Act 1980 HMSO (ISBN 0105466808)

Landfill Tax Regulations 1996 SI 1996, No 1527 (ISBN 0110443810)

Sludge (Use in Agriculture) Regulations 1989 SI 1989, No 1263, HMSO (ISBN 0 11 0972635)

as amended by the Sludge (Use in Agriculture) Regulations 1990 SI 1990, No 880, HMSO (ISBN 0110038800)

Special Waste Regulations 1996 SI 1996/972, as amended by the Special Waste (Amendment) Regulations 1996 SI 1996/2019, The Stationery Office, (ISBN 0110629418), and the Special Waste (Amendment) Regulations 1997 SI 1997/251, The Stationery Office (ISBN 0110638816)

Town and Country Planning (Assessment of Environmental Effects) Regulations 1988 SI 1988, No 1199, HMSO (ISBN 0110871995) as amended by SI 1990, No 367, HMSO (ISBN 0-10-543-7743)

Town and Country Planning (General Permitted Development) Order 1995 SI 1995, No 418, HMSO (ISBN 011052506x)

Welfare of Livestock Regulations 1994 SI 1994, No 2126, (ISBN 0110451260)

#### Legislation: smoke pollution

The Clean Air Act 1993 HMSO (ISBN 0105411930)

The Clean Air (Emission of Dark Smoke) (Exemption) Regulations 1969 Statutory Instrument No 1969/1263, HMSO

The Crop Residues (Burning) Regulations 1993 SI 1993, No 1366, HMSO (ISBN 0110343662)

The Environmental Protection (Prescribed Processes and Substances) Regulations 1991 Statutory Instrument No 1991/472 as amended, HMSO

Secretary of State's Guidance Notes:

Animal carcase incineration Processes under 1 Tonne per Hour PG 5/3 (95), HMSO (ISBN 0117531545)

Combustion of Fuel Manufactured from or Comprised of Solid Waste in Appliances

Between 0.4 and 3 MW Net Rated Thermal Input PG 1/12 (95), HMSO (ISBN 0117531960)

General Waste Incineration Processes under 1 Tonne an Hour PG 5/4 (95), HMSO (ISBN 0117531553)

Poultry litter Combustion Processes between 0.4 and 3MW Net Rated Thermal Input PG 1/9 (91), HMSO (ISBN 0117523992)

Production of Compost for Mushrooms PG 6/30 (92), HMSO (ISBN 0117526118)

Waste Oil Burners, less than 0.4 MW Net Rated Thermal Input PG1/1 (95), HMSO (ISBN 0117531944)

Waste Oil or Recovered Oil Burners, less than 3MW Net Rated Thermal Input PG 1/2 (95). HMSO (ISBN 0117531952)

Wood Combustion Processes between 0.4 and 3 MW Net Rated Thermal Input (PG 1/8 (91), HMSO (ISBN 0117524069)

**Codes of Practice**

Code of Practice for Agricultural Use of Sewage Sludge Department of Environment, 1989, Revised 1996, WQI/96/99. Available from DETR Publications Sales Centre (Tel: 01709 891318 or Fax: 01709 881673)

*Water Code* (Code of Good Agricultural Practice for the Protection of Water) (PB 0587) MAFF, 1991, Revised 1998. Available free of charge from MAFF Publications, Admail 6000, London SW1A 2XX. Tel: 0645 556000

*Soil Code* (Code of Good Agricultural Practice for the Protection of Soil) (PB 0617) MAFF, 1993, Revised 1998. Available free of charge from MAFF Publications, Admail 6000, London SW1A 2XX. Tel: 0645 556000

Code of Practice for the Safe Use of Pesticides on Farms and Holdings, 1998, (PB 3528). Available free of charge from MAFF Publications, Admail 6000, London SW1A 2XX. Tel: 0645 556000

**MAFF Codes of Recommendations for the Welfare of Livestock**

Cattle 1983, PB0074  
Domestic Fowls 1987, PB0076  
Pigs 1983, PB0075  
Sheep 1989, PB00078  
Turkeys 1987, PB0077  
Goats 1989, PB0081

*Available free of charge from MAFF Publications, Admail 6000, London SW1A 2XX. Tel: 0645 556000*

**Greenhouse gases**

This Common Inheritance. Britain's Environmental Strategy HMSO, 1990 (ISBN 0 10 112002 8)

Climate Change – The IPCC Scientific Assessment edited by J.T. Houghton, G.J. Jenkins & J.J. Ephraums, published for the Intergovernmental Panel on Climate Change by Cambridge University Press, Cambridge, 1990. (ISBN 0521407206)

Climate Change: The UK Programme. The United Kingdom's Second Report under the Framework Convention on Climate Change 1997, The Stationery Office, (ISBN 0101355823)

Review of the Potential Effects of Climate Change in the United Kingdom. United Kingdom Impacts Review Group Second Report Department of Environment, 1996, HMSO, (ISBN 0117532908)

Refrigeration and Air Conditioning CFC Phase-out. Advice on Alternatives and Guidelines for Users Department of Trade and Industry (Dti/Pub/1147/4k/11.94)

The Potential Effects of Ozone Depletion in the United Kingdom. United Kingdom UVB Measurements and Impacts Review Group Department of the Environment, 1996 (ISBN 0117533130)

#### Other publications

British Standards 2742: 1969 Notes on the Use of Ringelmann and Miniature Smoke Charts BSI.

British Standard 5502: Buildings and Structures for Agriculture Part 50: 1989, Code of Practice for design, construction and use of reception pits and storage tanks for slurry; Part 33: 1991, Guide to the control of odour pollution BSI

Control of Pollution (Silage, Slurry and Agricultural Fuel Oil) Regulations 1991 (amended) GUIDANCE NOTES FOR FARMERS Department of Environment, WOAD, April 1997. Available from Room A405, Department of the Environment, Transport and the Regions, Romney House, Marsham Street, London SW1P 3PY

Effluent Storage on Farms. HSE Guidance Note GS12 (May 81)

Guidance Notes to Farmers When Burning Crop Residues MAFF, 1993, PB1326. Available free of charge from MAFF Publications, Admail 6000, London SW1A 2XX. Tel: 0645 556000

Planning Policy Guidance Note 7: The Countryside – Environmental Quality and Economic and Social Development (PPG7), revised 1997, HMSO (ISBN 011753370x)

Poultry Litter Management, PB1739, MAFF, 1994. Available free of charge from MAFF Publications, Admail 6000, London SW1A 2XX. Tel: 0645 556000

Slurry Storage Systems. Health and Safety Executive (Annex to AIC 1986/155)



# INDEX

## Index

Numbers in the index refer to paragraph numbers e.g., 92 in the text. Definitions and descriptions in panel boxes in the text are denoted by page numbers in a box e.g. **17**

<b>A</b>	Above-ground circular stores	92
	Additives for odour control	117-119
	Advice	6
	Aerobic treatment	108, 107-110
	Ammonia	138-150
	Anaerobic treatment	111-112
	Animal carcasses	180-187
	Application of livestock wastes to land	30-56
<b>B</b>	Band spreading	36, 46, <b>17</b>
	Battery manure	(see Poultry manures)
	Bedding	59, 65-66, 70-71, 77
	Best practicable means (BPM)	1, 10
	Biological treatment of slurries	105-106
	Broiler manure	(see Poultry manures)
<b>C</b>	Carbon dioxide	220-222
	Carcasses	(see Animal carcasses)
	Cattle manure	(see Solid manures)
	Cattle slurry	42-50, 90-94, 98-119
	CFCs	226-227
	Clean Air Acts 1993	14-17, 173, 187, 202, 210, 213
	Consultants	(see Professional help)
	Cow slurry	(see Slurry)
	Crop residues	204-206, 213-215
<b>D</b>	Dairy farms	65-67
	Dark smoke	(see Smoke)
	Dirty water	63, 67, 51-53, 125
<b>E</b>	Environmental assessment	13, 126
	Environmental Health Officer (EHO)	6, 7-9, 17, 28-29, 121
	Environmental Protection Act 1990	7-10, 18, 121, 153, 173, 179, 184, 190-191, 199-200, 202-203, 213
<b>F</b>	Farmyard manure	(see Solid manures)
	Feeds	78-79
	Fines	10
<b>G</b>	Greenhouse gases	216-228 <b>68</b>
<b>H</b>	Hedge trimmings	207-210, 213-215
<b>I</b>	Incineration	184-185, 189-191
	Injection	(see Soil injection)
	Irrigators	51-53
<b>L</b>	Land application	(see Application of wastes to land)
	Legislation	7-13, 18, 121, 204-206

<hr/>	
Livestock buildings	
● siting	126-132
● new	11-13, 132
● odour control	57-84
● cleaning	60-67
● dairy	65-67
● pig	68-73
● poultry	74-77
● ventilation	61-62
<hr/>	
<b>M</b> Manures	(see Solid manures)
<hr/>	
Mechanical separation of slurry	93, 100-104 <b>29</b>
<hr/>	
Methane	223-224
<hr/>	
Milk	52, 79, 91
<hr/>	
Mushroom compost	120-125
<hr/>	
<b>N</b> Nitrous oxide	225
<hr/>	
<b>O</b> Odours	
● application of livestock wastes to land	30-56
● causes	21-25
● complaints	21-23, 28-29
● concentration	<b>13</b>
● dairy buildings	65-67
● feeds	78-79
● general control	26-29, 32-33
● housed livestock	59
● measurement	<b>13</b>
● milk	79
● mushroom compost	120-125
● open concrete	63
● pig units	68-73
● poultry manure storage	95-97, 123
● poultry units	74-77
● silage	81-84
● siting of livestock buildings and stores	126-132
● slurry storage	90-94
● solid manure storage	87-89
● swill	80
● treatment of livestock wastes	98-119
● treatment of odorous air	116
● ventilation of buildings	61-62
<hr/>	
Open burning	151-156, 173, 186-187, 202-212, 213-215
<hr/>	
<b>P</b> Paper waste	211, 213-215
<hr/>	
Parlour washings	67
<hr/>	
Pig manure	(see Solid manures)
<hr/>	
Pig slurry	42-50, 72-73, 90-94, 98-119
<hr/>	
Pig units	13, 68-73
<hr/>	
Planning permission	11-13, 126-132
<hr/>	
Plastics materials	163-173
<hr/>	
Poultry manures	54-56, 61-62, 76-77, 95-97, 191-201, 212
<hr/>	
Poultry units	13, 74
● caged laying	75-76
● deep litter	77
<hr/>	
Prescribed processes	18, 121, 179, 184-185, 190-191, 204, <b>7</b>
<hr/>	
Professional help	6, 10, 28

## Index

<b>R</b>	Recycling	154, 157-162, 165-172, 178			
	Rubber	174-176			
<b>S</b>	Separation of slurry (see Mechanical separation)				
	Sewage sludge	41			
	Silage	52, 81-84, 91			
	Siting of livestock buildings/stores	126-132			
	Slurry (see Cattle slurry or Pig slurry)				
	Smoke				
	● animal carcasses	180-187			
	● avoiding	20-29			
	● burning in the open	213-214			
	● crop residues	204-206			
	● definition	<b>46</b>			
	● legislation	8, 14-17, 153			
	● paper waste	211			
	● plastic materials	163-173			
	● poultry litter	188-201, 212			
	● rubber	174-176			
	● straw (fuel)	188-196			
	● tyres	174-176			
	● waste oil	177-179			
	● wood (fuel)	188-196			
	● wood wastes	207-210			
	Smoke control areas	17			
	Smoke nuisance (see Smoke)				
	Soil injection	36, 47-49, <b>17</b>			
	Solid manures	54-56, 70-71, 87-89, 120-125			
	Spreading machinery	32-34, 42-50			
	Sprinklers	51-53			
	Storage/handling				
	● manures	85-89			
	● slurry	32, 65-69			
	● poultry manure	95-97, 123			
	Straw (fuel)	188-196			
	Swill	80			
<b>T</b>	Town and Country Planning General Permitted Development Order 1995	11-12, 126			
	Travelling irrigators	51-53			
	Treatment of livestock wastes	98-117			
	Treatment of odorous air	116			
	Tyres	174-176			
<b>V</b>	Ventilation of buildings	61-62			
<b>W</b>	Waste Disposal Authorities	6, 162			
	Waste oils	177-179			
	Weeping-wall slurry stores	94			
	Whey	79, 91			
	Wood (fuel)	189-196			
	Wood waste	207-210, 214-215			
<b>Y</b>	Yard run-off	63, 125			